



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
09/24/24	M	Updated Specifications	D.L.	B.S.	

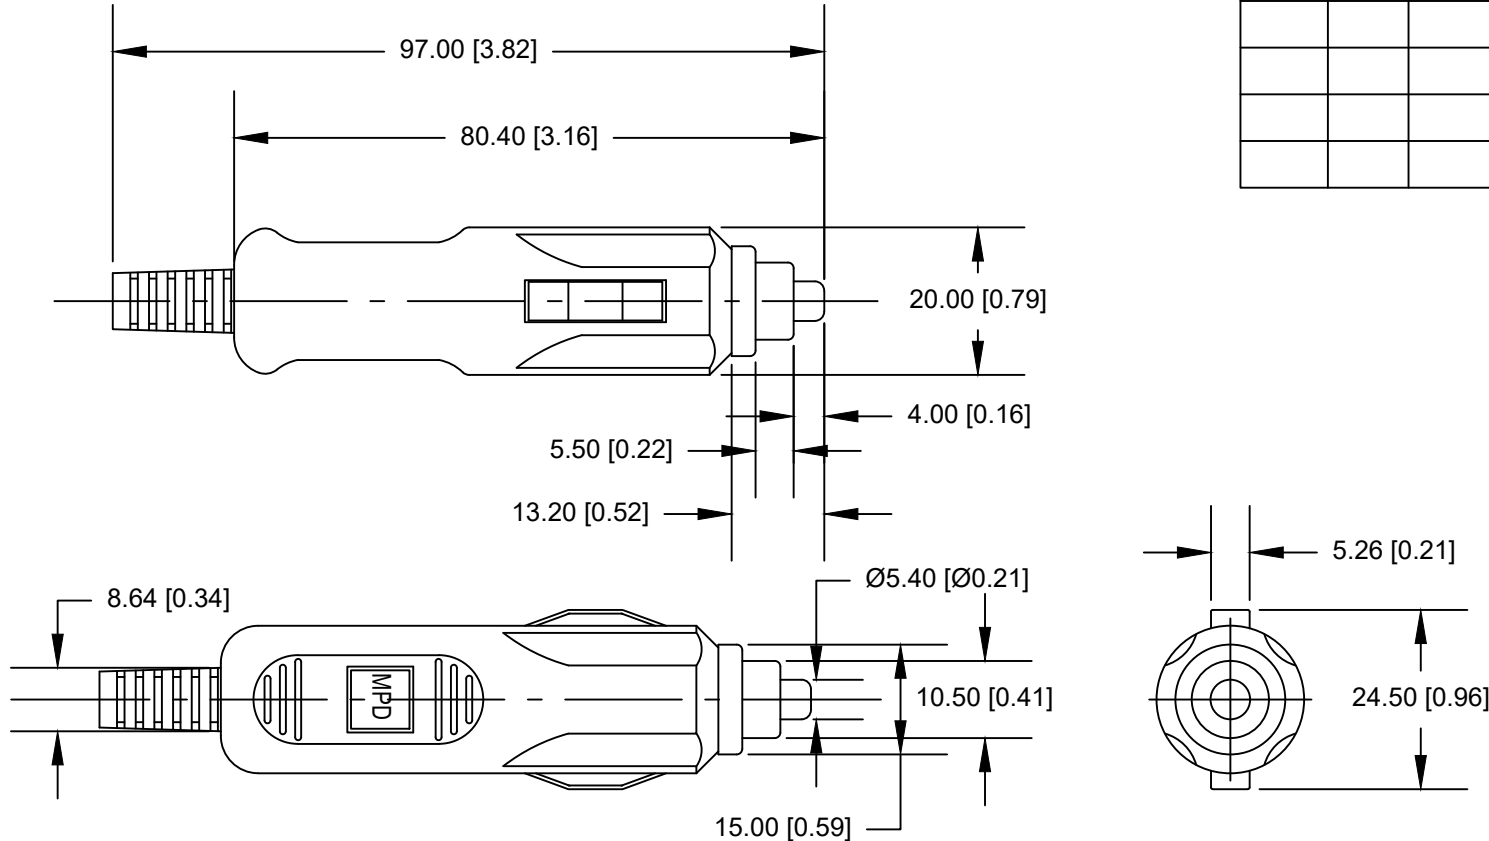

SPECIFICATION:
 BODY: NYLON 6, FLAMMABILITY RATING UL94V-0,
 UL FILE NO. E154352
 COLOR: BLACK
 CENTER CONTACT: BRASS, NICKEL PLATED
 POSITIVE TERMINAL: PHOS. BRONZE, NICKEL PLATED
 NEGATIVE TERMINAL: SKS, NICKEL PLATED
 RING: BRASS, NICKEL PLATED
 SPRING: PHOS. COPPER
 WIRE STRAIN RELIEF: PVC
 FUSE: 6.00mm X 30mm, 15AMP RATED AT 18 HOURS,
 CONTINUOUS DUTY, QUICK BLOW FUSE
 RATED AT 18 HOURS, CONTINUOUS DUTY
 15AMP'S MAX WITH CORRECT FUSE
 ROHS COMPLIANT

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
Decimal		Scale	Drawn By B.S.
±.5 (.020)			Approved By D.L.
Fractional	Title		
±.8 (.030)	15 AMP CIGARETTE PLUG FOR 21 OR 22.2mm DIA. SOCKETS WITH RED LED		
Angular	Date	Drawing Number	
± 3°	09/24/24	APP-001-15AMP	