
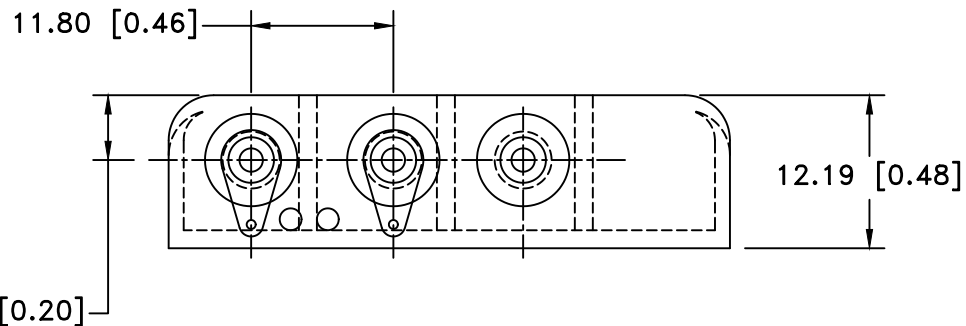


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
11/30/12	B	UPDATED NOTES	T.B.	B.S.	
07/07/17	C	ADDED DIM. Ø2.74	T.B.	B.S.	
07/17/17	D	ADDED MOUNTING INSTRUCTION	T.B.	B.S.	
3/07/19	E	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

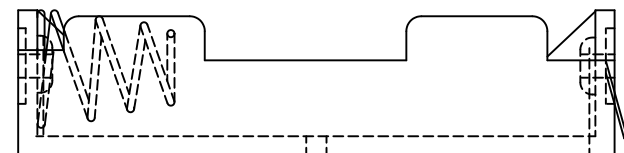


**NOTES:**

**1. MATERIAL:**

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKEL PLATED.  
 LUGS: BRASS, NICKEL PLATED  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
 ROHS COMPLIANT.

**Mounting Instruction:**

Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange stimpson GS-3 series or equivalent. also adhesives and double sided tapes work well.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title	FOUR "AAA" CELL HOLDER	
Angular ± 3°	Date	Drawing Number	
	03/07/19	BC4AAAL	
			Approved By T.B.