
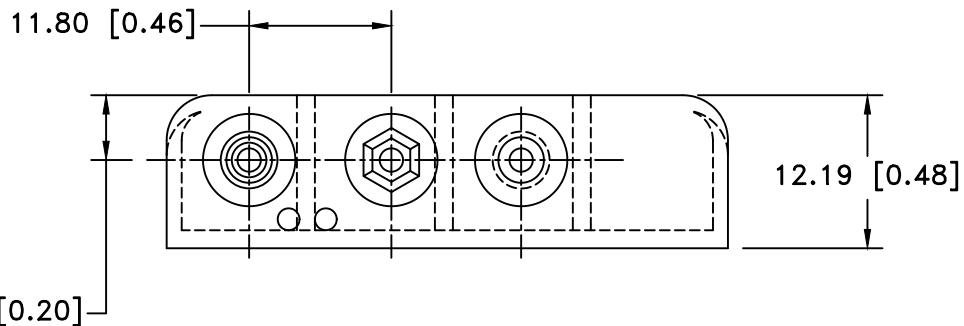


Ø2.74 [Ø0.11]      Ø2.50 [0.10]

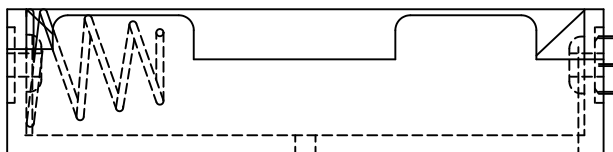

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/14/13	C	UPDATED TITLE	T.B.	B.S.	
07/07/17	D	ADDED DIM. Ø2.74	T.B.	B.S.	
03/07/19	E	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	

**NOTES:**


**1. MATERIAL:**

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING- UL94-HB, UL FILE NO. E216959  
 RIVETS: BRASS, NICKEL PLATED.  
 SPRING: SPRING STEEL, NICKEL PLATED.  
 TEMPERATURE RANGE: -10°C TO +110°C  
 9 VOLTS SNAPS: BRASS, NICKEL PLATED.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000

ROHS COMPLIANT

**MOUNTING INSTRUCTION:**

USE 2-56 MACHINE SCREWS OR EYELETS 0.089" OD  
 BY 0.15" FLANGE STIMPSON GS-3 SERIES OR EQUIVALENT.  
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title FOUR "AAA" CELL HOLDER WITH SNAP FASTENERS		
Angular ± 3°	Date 03/07/19	Drawing Number BC4AAASF	