



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
1/08/16	C	DIM. 24.00 WAS 20.00 ROTATED COMPONENTS TO 90°	T.B.	B.S.	
3/26/19	D	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
2/05/20	E	Rotate parts 90° Dim. 20.00 was 24.00	T.B.	B.S.	

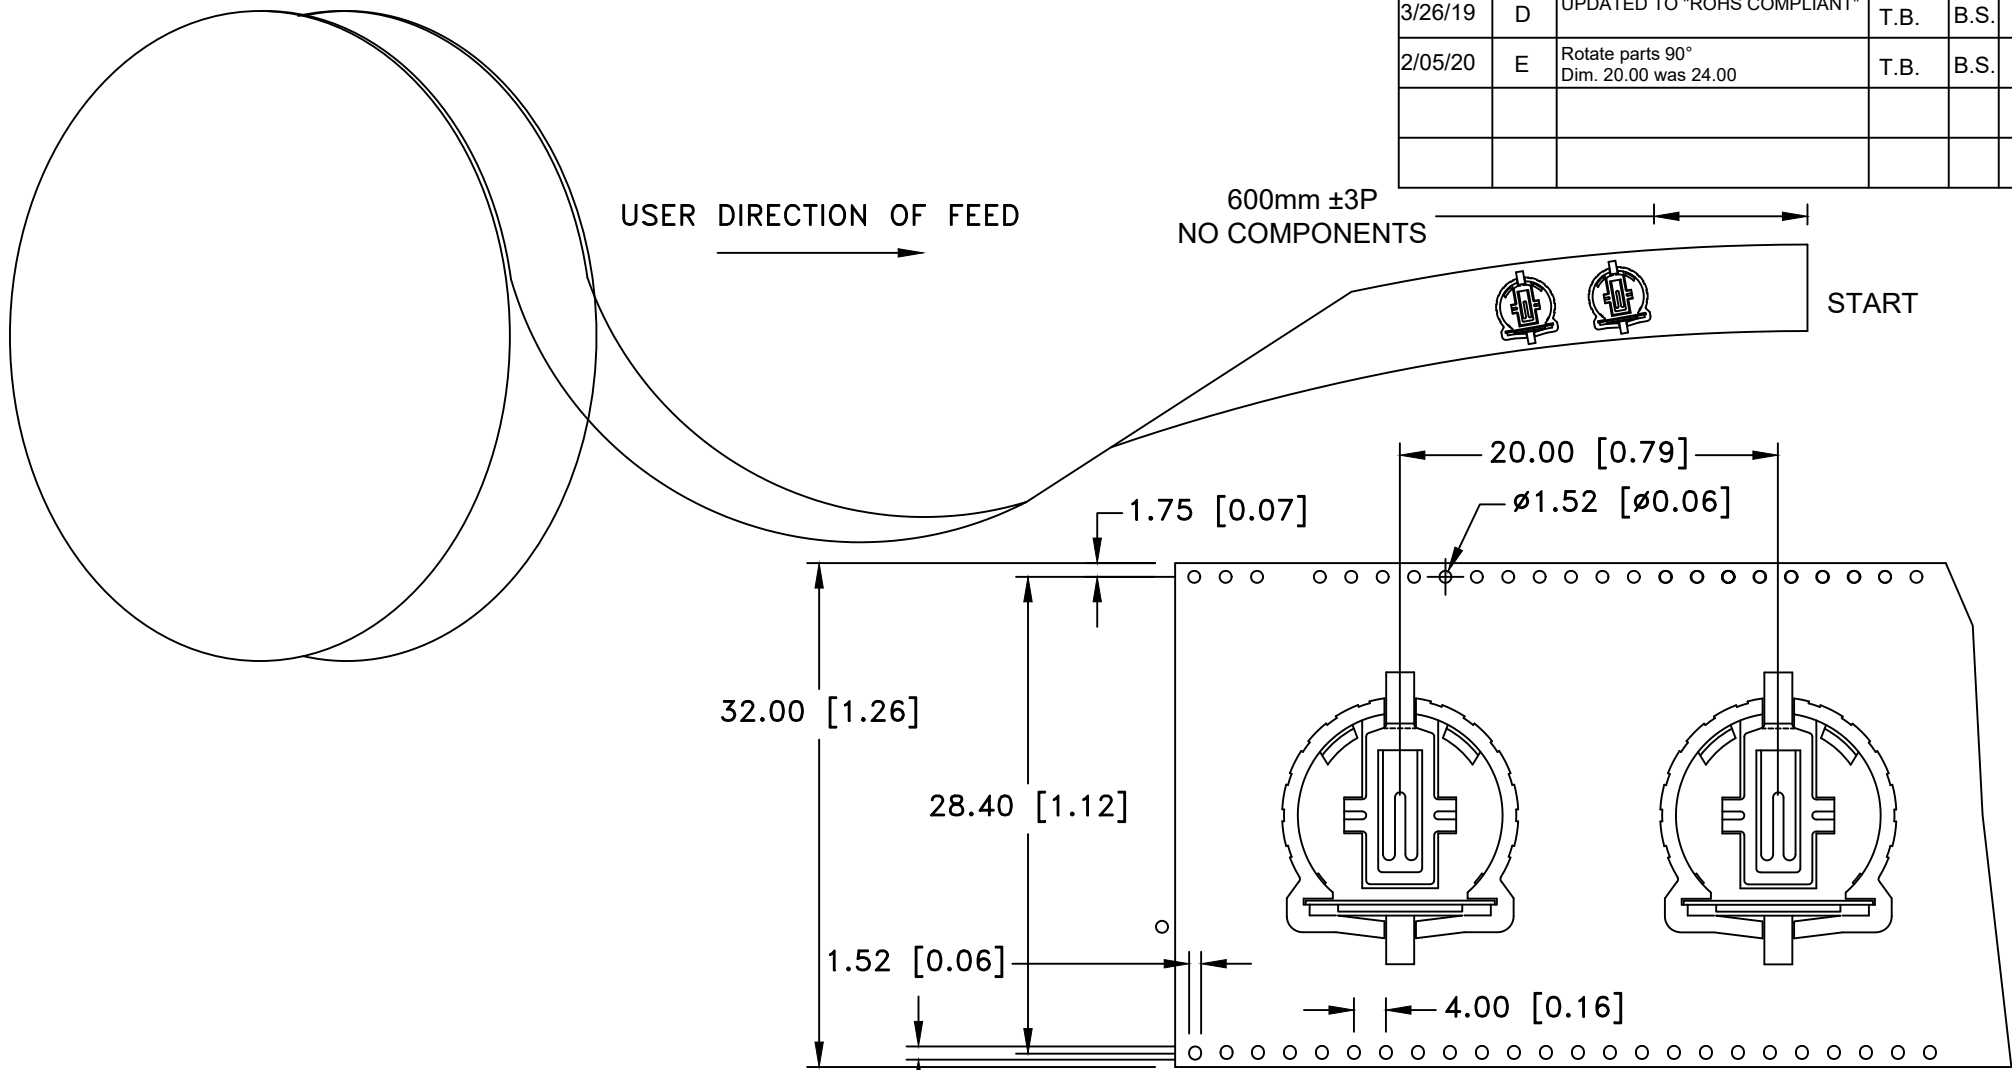

- NOTES:
- 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20$ mm
  - Carrier camber not to exceed 1mm in 250mm
  - Material: Transparent Anti-static Polystyrene
  - Thickness:  $0.35 \pm 0.05$ mm
  - Component loader per 13" reel: 500 pcs
  - All dimensions per EIA-481-C
- ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 02/05/20	Drawing Number BC501SM-TR-99	
		Approved By T.B.	