



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/19	A	UPDATED TO "ROHS COMPLIANT"	T.B.	B.S.	
11/26/19	B	WAS RATED 20 AMP. ADDED WIRE LENGTH	T.B.	B.S.	

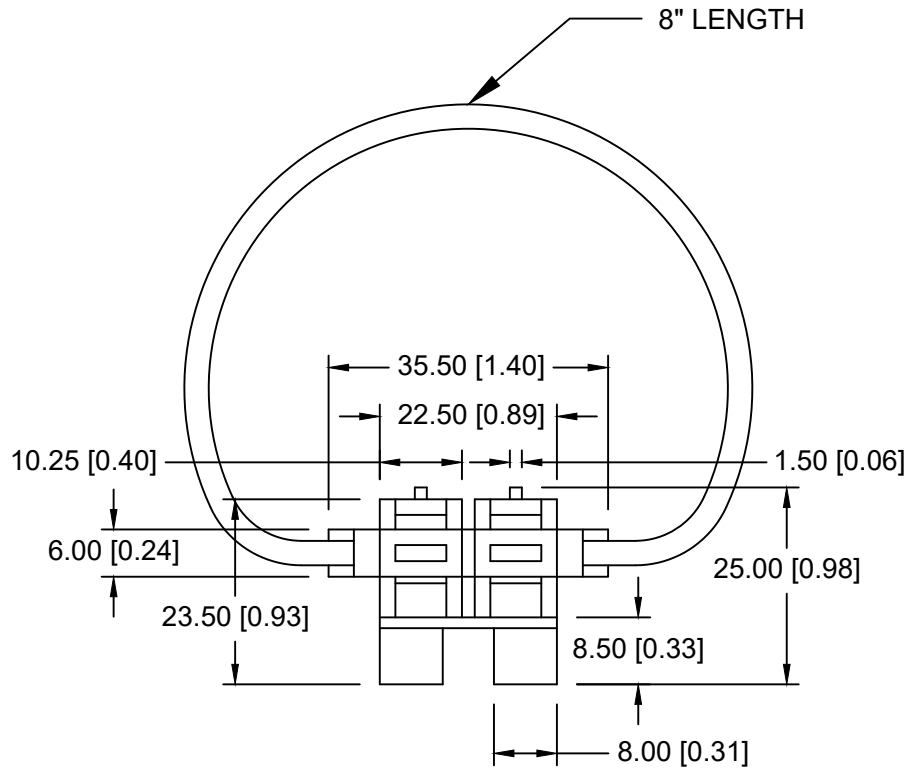

WATER RESISTANT TYPE

NOTES:

- MATERIAL:
HOUSING : NYLON 66,UL94V-2, UL FILE NO. E41938
 - WIRE: RED WIRE, 16 AWG, UL 1015, 600V, 105°C,
FLAME RATED VW-1, UL FILE NO. E77981 OR ENGINEERING
APPROVED EQUIVALENT
 - RATED CURRENT: 15A
 - ACCEPTS ATP/ATC/ATO FUSES
 - INSULATION RESISTANCE AT 500V DC: 100MΩ MIN
 - CONTACT RESISTANCE: 5mΩ AT 1A DC
 - DIELECTRIC STRENGTH FOR 60 SECONDS: AC 1500V MIN
- ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title INLINE FUSE HOLDER		
Angular ± 3°	Date 11/26/19	Drawing Number BF354	
		Approved By T.B.	