


PCB LAYOUT

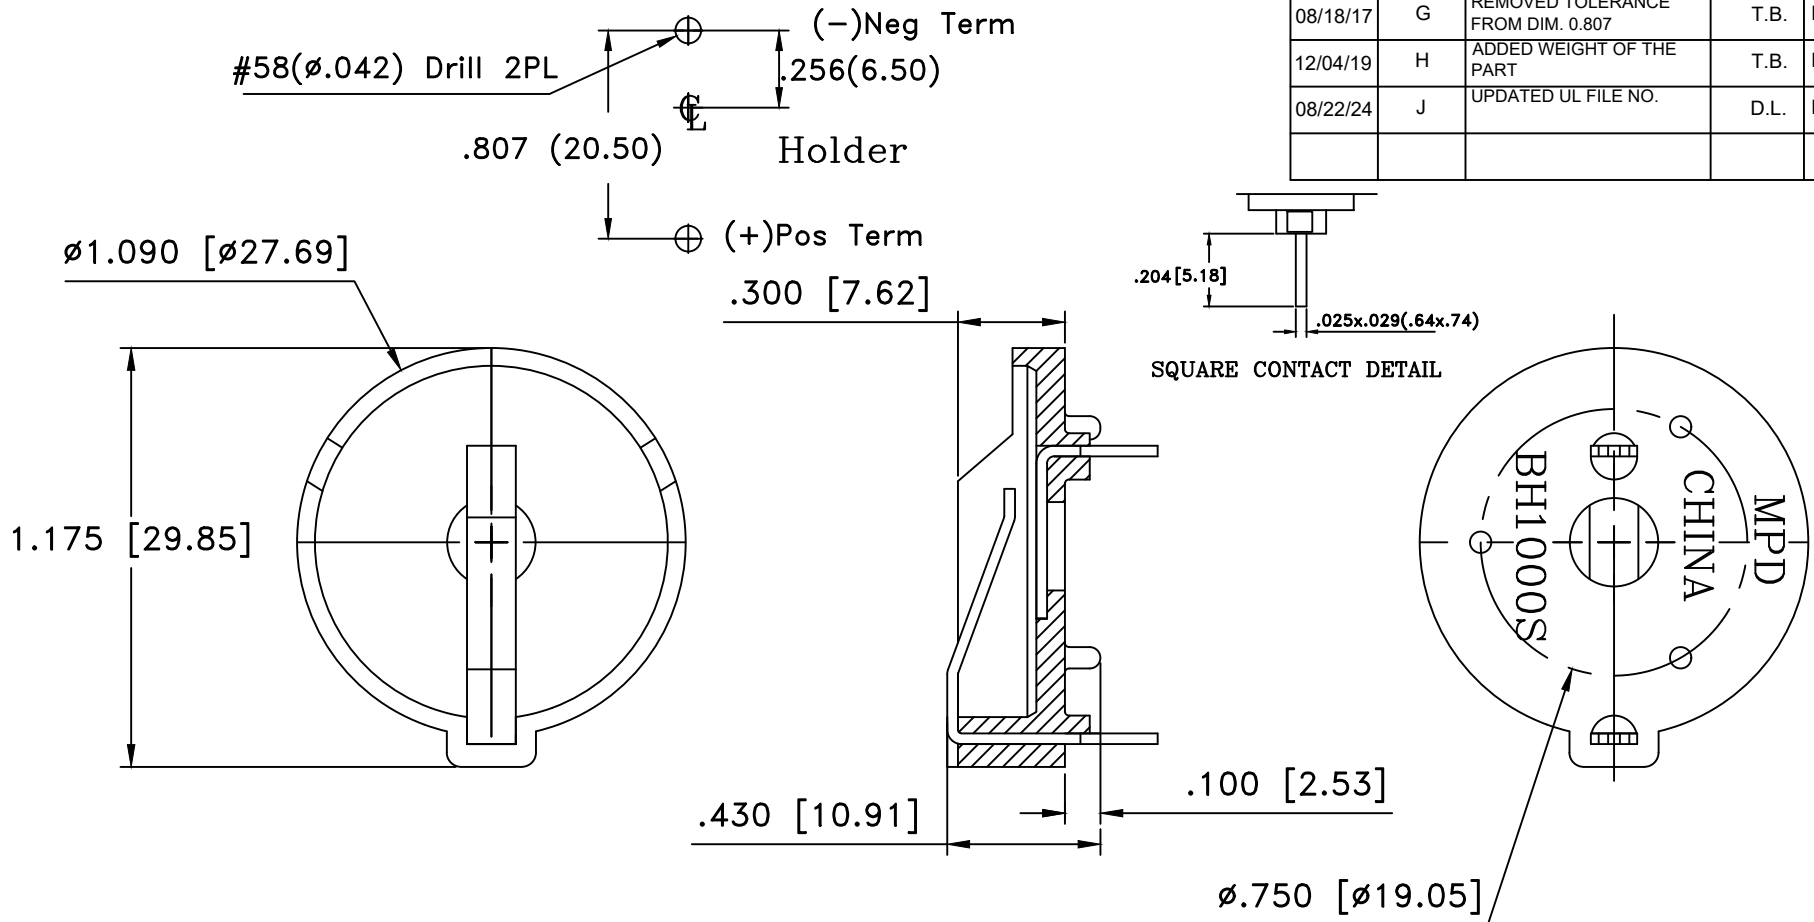

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/18/17	G	REMOVED TOLERANCE FROM DIM. 0.807	T.B.	B.S.	
12/04/19	H	ADDED WEIGHT OF THE PART	T.B.	B.S.	
08/22/24	J	UPDATED UL FILE NO.	D.L.	B.S.	

SPECIFICATIONS

- *Holder material—thermoplastic, black PBT
- *Flammability rating—UL94V-0, File No.E45587
- *Contacts—302 spring temper stainless steel nickel plated overall
- *Dielectric strength—560volts/mil at 25°C for 5seconds
- *Temperature range— -55° to +180°C
- *Resistance to solvents—Xylene,ethyl,butyl,methyl&proptl alcohol;ethyl acetate,heptane;toluene;refrigerant
- * APPROXIMATE WEIGHT: 3.26g
- *ROHS COMPLIANT

Tolerance (Except as noted)	MPD Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		decimal $\pm .5$ (.020)	4=1 Approved By D.L.
Fractional $\pm .8$ (.030)	Title BR/CR/DL (2)2420 OR (1)2450 OR (2)2430 COIN BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 08/22/24	Drawing Number BH1000S	