

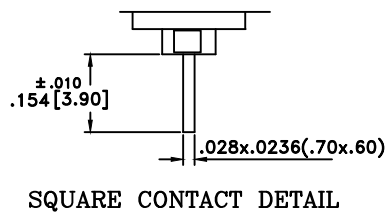
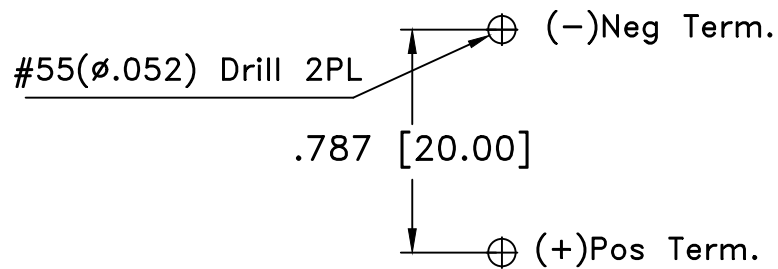
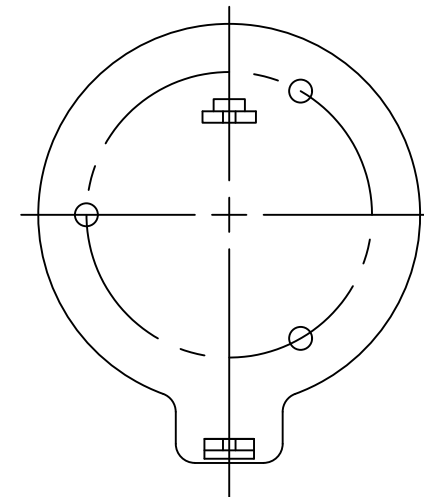


PCB LAYOUT

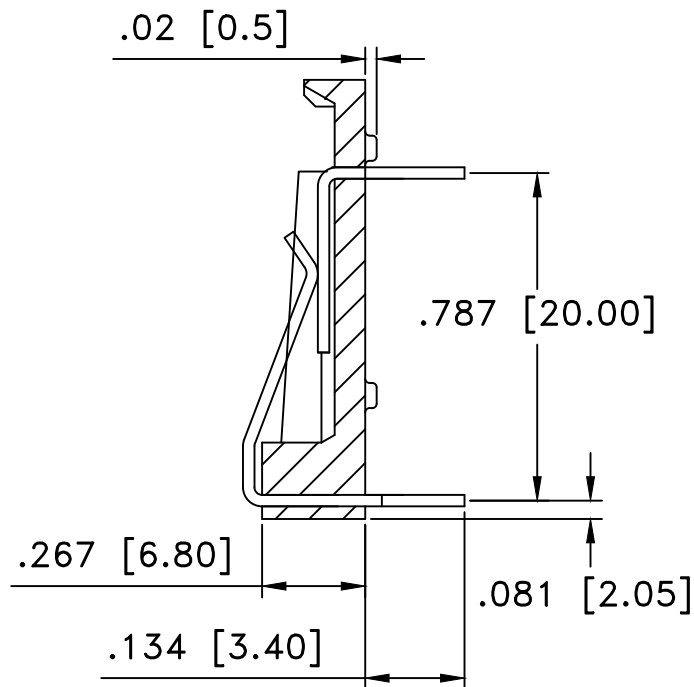


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/04/19	F	ADDED WEIGHT OF THE PART	T.B.	B.S.	

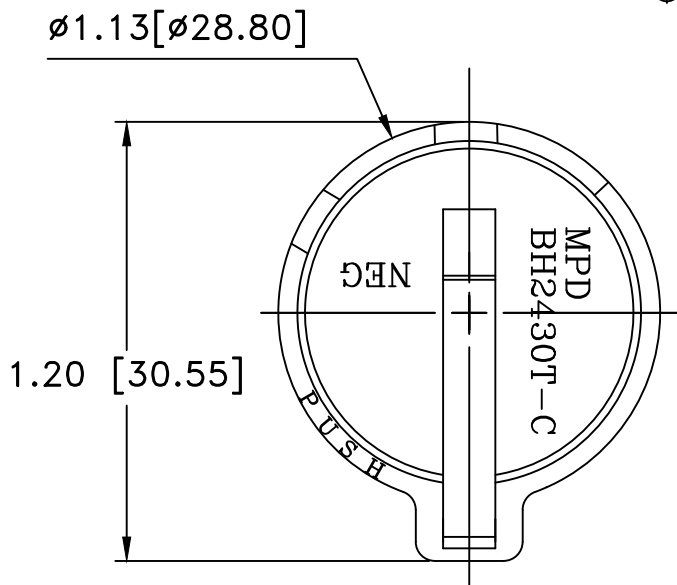

SPECIFICATIONS

- *Holder material- Nylon 66 33% G/F, UL94V-HB
UL File No. E41938
- *Contacts :
Positive: 0.0236" thick PHOS-BRONZE, Nickel Plated.
Negative: 0.0236" thick spring tempered Stainless Steel, Nickel Plated.
Temperature Range: -40°C to +235°C
- * APPROXIMATE WEIGHT: 2.55g
- *ROHS COMPLIANT

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
	decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title BATTERY HOLDER FOR CR2430 CELLS			
Angular ± 3°	Date 12/04/19	Drawing Number BH2430T-C-HITE		
Approved By T.B.				