
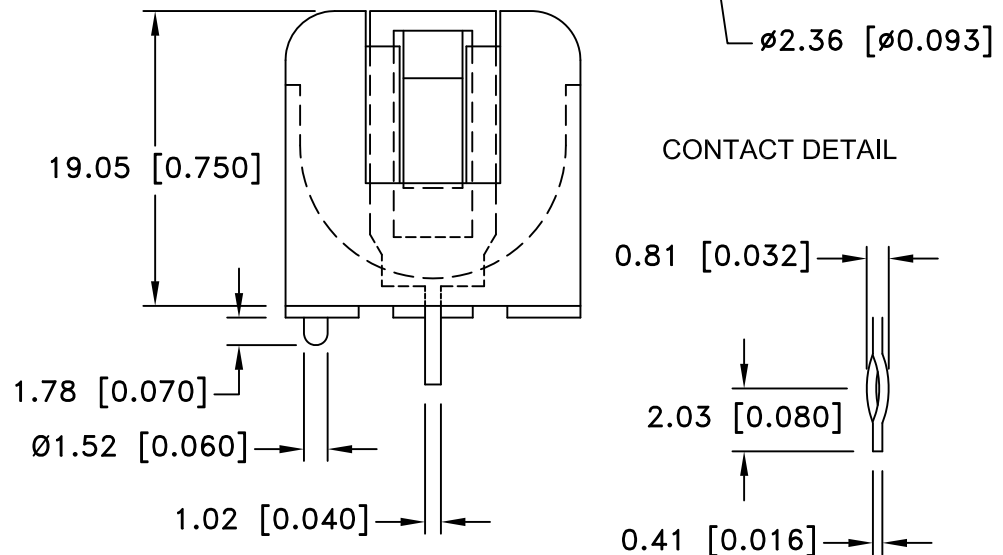


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/29/05	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
11/19/05	B	UPDATED TITLE	T.B.	B.S.	
1/14/06	C	DIM. 42.04 WAS 41.28	T.B.	B.S.	
12/05/14	D	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
12/11/15	E	UPDATED UL FILE NO.	T.B.	B.S.	

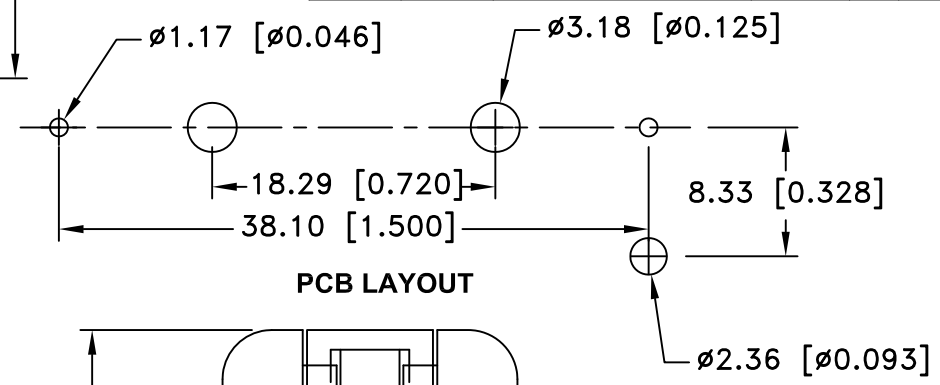


**SPECIFICATIONS:**

Holder Material: Black PBT  
 Flammability Rating: UL94V-0, FILE #E51743  
 Contacts: 301 Spring temper stainless steel, nickel plated overall  
 Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.  
 Temperature Range: -55°C to +180°C  
 Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds  
 Shock Test: Half sine wave acceleration 150g, 6 milliseconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage

**NOTES:**

Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange  
 Flange Recess Ø0.203" x 0.090" Deep  
 Accepts Standard 2-56 Machine Screws  
 Accessories: BI-UM-3-4, Insulator  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ± .8 (.030)	Title BR/CR 2/3A BATTERY HOLDER, PCB MOUNTING		
Angular ± 3°	Date 12/11/15	Drawing Number BH2/3A-3	