



PCB LAYOUT

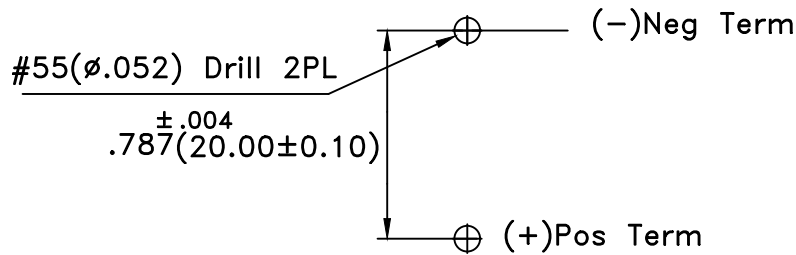


| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--------------------------|------|------|-----|
| 10/17/19 | G | ADDED WEIGHT OF THE PART | T.B. | B.S. | |
| 08/22/24 | H | UPDATED UL FILE NO. | D.L. | B.S. | |
| | | | | | |
| | | | | | |

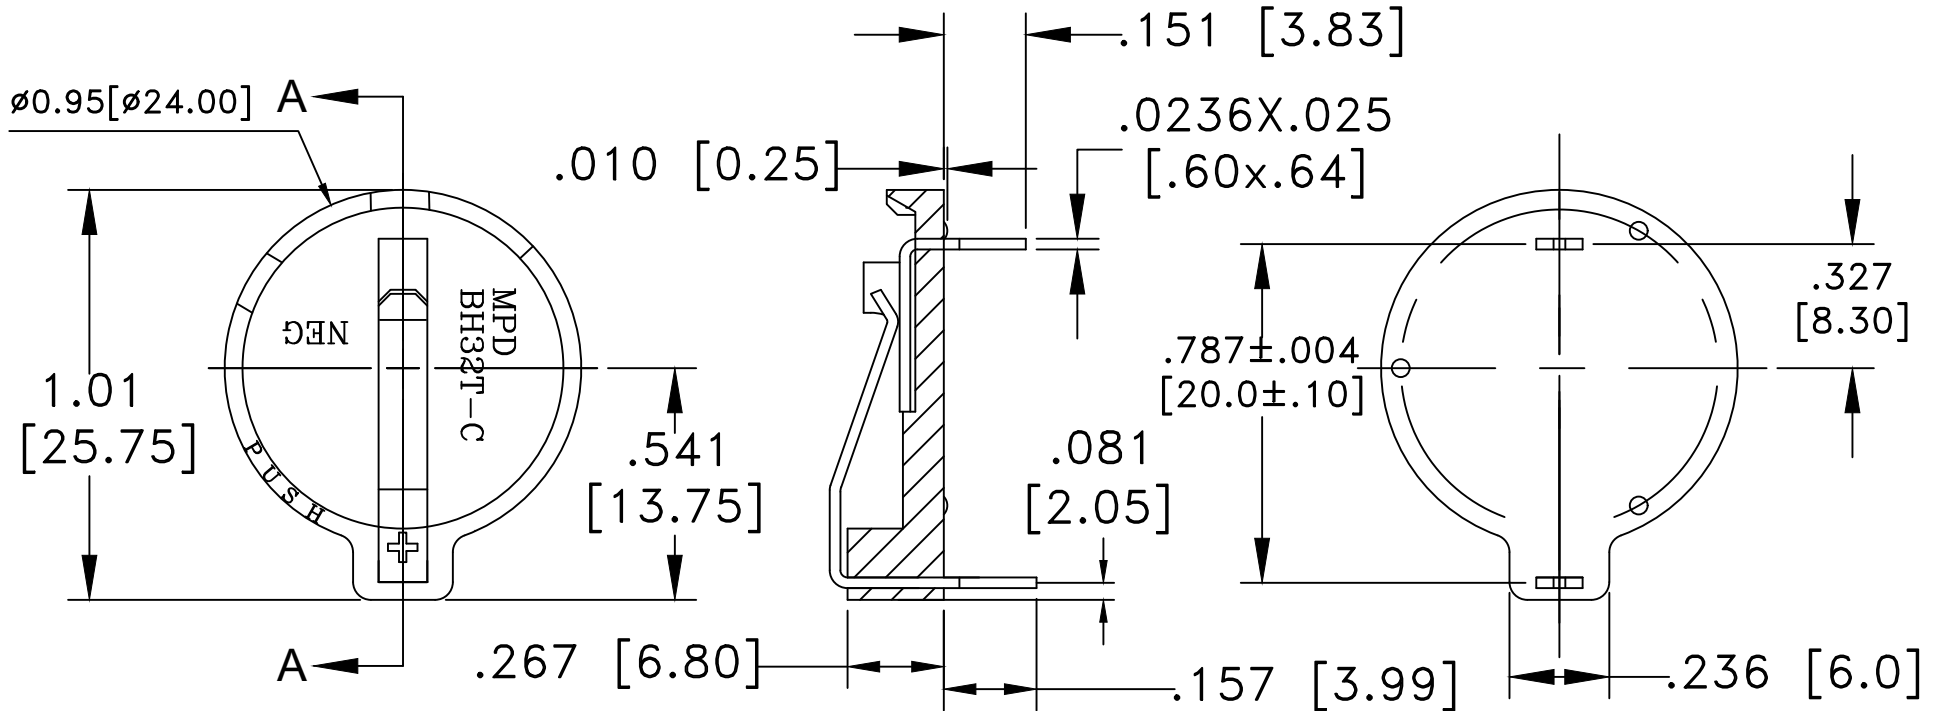

Weight: 2.30 g.

SPECIFICATIONS

- *Holder material- Black PBT
- *Flammability rating-UL94V-0, UL file no. E45587
- *Contacts :
Positive: 0.0236" Thick PHOS-BRONZE, Nickel Plated
Negative: spring tempered Stainless Steel, Nickel Plated
- *Temperature Range: -40°C to +140°C
- ROHS COMPLIANT

| | | | |
|--------------------------------|---|---------------------------|--|
| Tolerance (Except as noted) |  Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | Scale | Drawn By B.S. | |
| Fractional ± .8 (.030) | Title CR2032 OR BR2032 BATTERY | | |
| Angular ± 3° | Date 08/22/24 | Drawing Number BH32T-C | |
| | | Approved By D.L. | |