



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/27/09	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	
04/12/13	B	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
06/16/17	C	DIM. 159.00 WAS 160.00 DIM. 15.90 WAS 16.00	T.B.	B.S.	

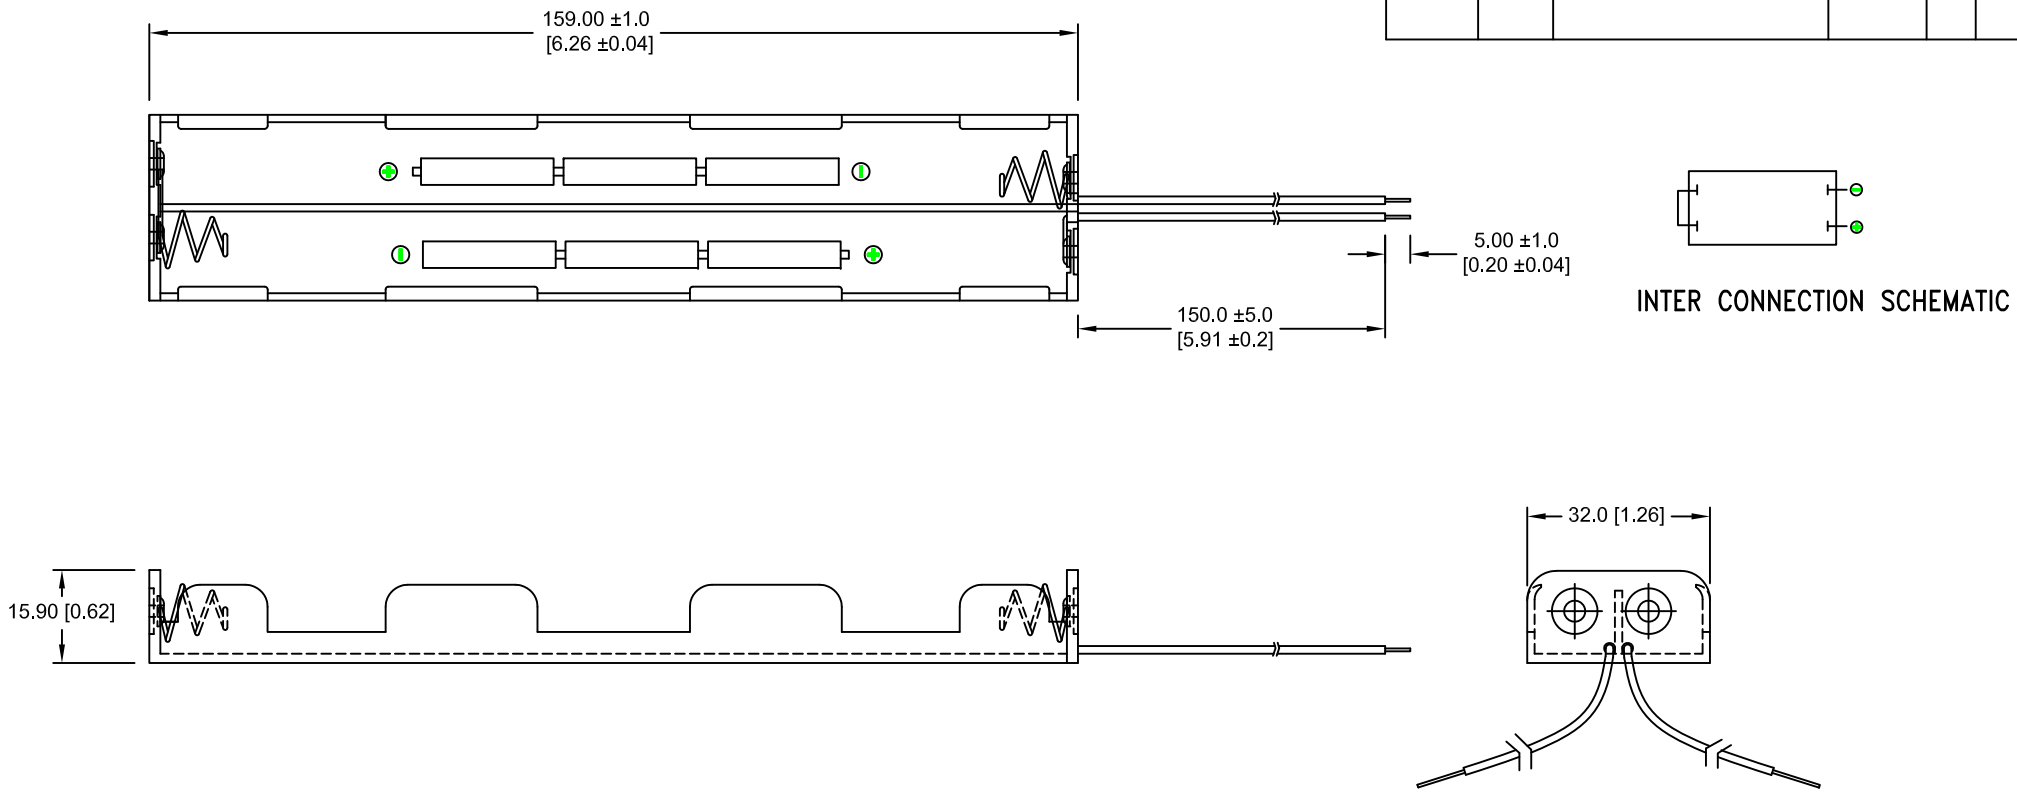

NOTES:  
 Plastic material - Polypropylene  
 Flammability Rating -UL94-HB, UL File NO. E216959  
 Temperature Range: -10°C to +100°C  
 Wires: 26 AWG, UL 1007, CSA, TR-64, 300V, 80°C  
 Springs - Nickel Plated Spring Steel  
 Rivets - Brass, Nickel Plated  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title 2AA BATTERY HOLDER WITH WIRE LEADS	Date 06/16/17	
Fractional ± .8 (.030)		Drawing Number BH362A	
Angular ± 3°			