
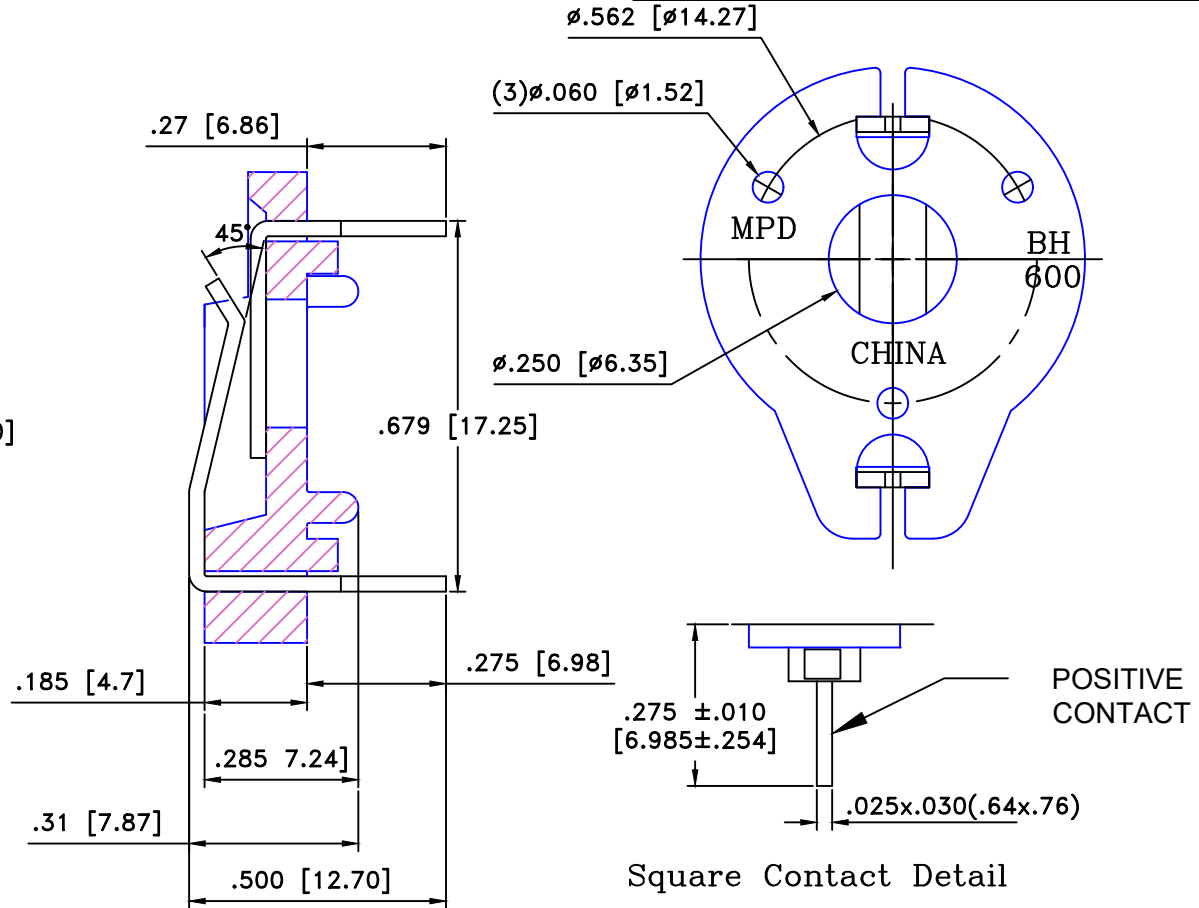



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
08/22/24	F	Updated UL file number	D.L.	B.S.	
01/29/25	G	Dim. .66 was .656 Dim. .025x.030 was .025x.029 Added Dim. .275, .679, .27 Updated specification notes	D.L.	B.S.	

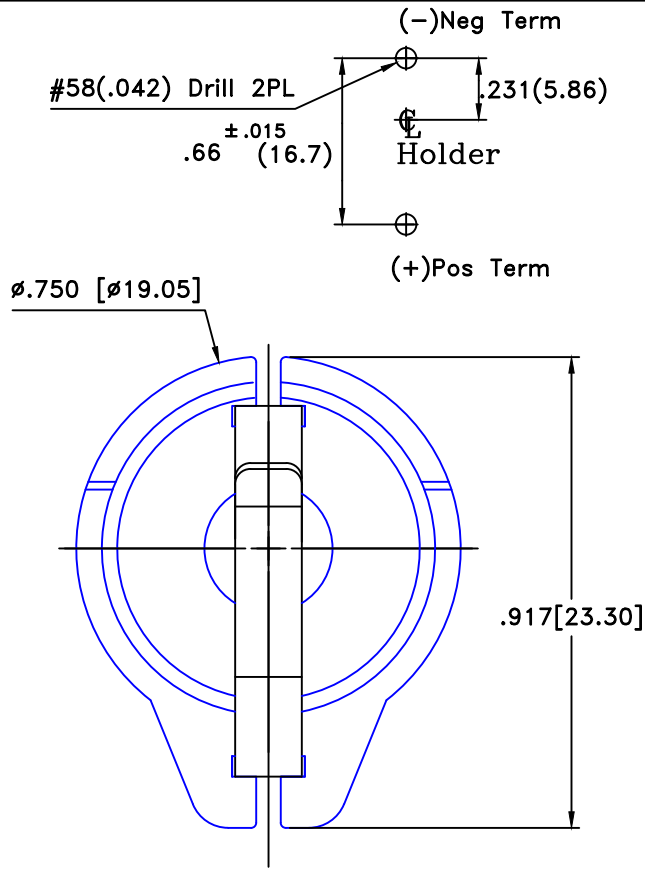

### Specifications:

- Holder material- Thermoplastic, Black PBT
- Flammability Rating - UL94V-0, File no. E53664
- Contacts - 302 spring temper stainless steel, Gold Flash Finish
- Dielectric strength - 560volts/mil at 25°C for 5 seconds
- Temperature range - -55°C to +180°C
- Resistance to solvents - Xylene, ethyl, butyl, methyl & proptl alcohol, ethyl acetate, heptane, toluene, refrigerant
- Approximate weight: 1.68g
- ROHS Compliant
- Positive contact may touch the negative contact. This is acceptable.

Tolerance (Except as noted)	 <b>Memory protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale 4=1	Drawn By B.S.	
Fractional ± .8 (.030)	Approved By D.L.		
Angular ± 3°	Title BR/CR/DL 1620/1632 COIN BATTERY HOLDER	Date 01/29/25	Drawing Number BH600-G