
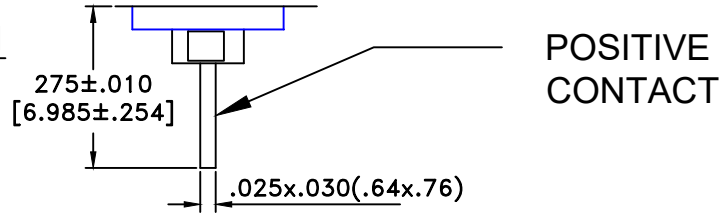
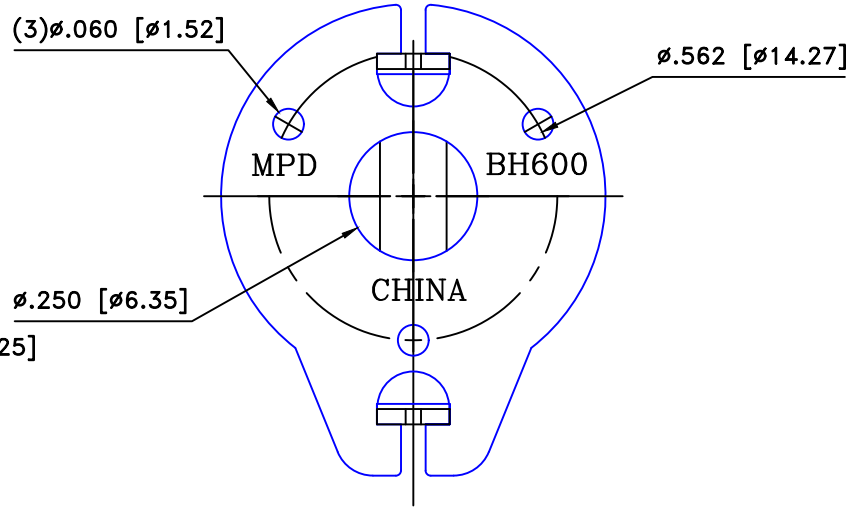
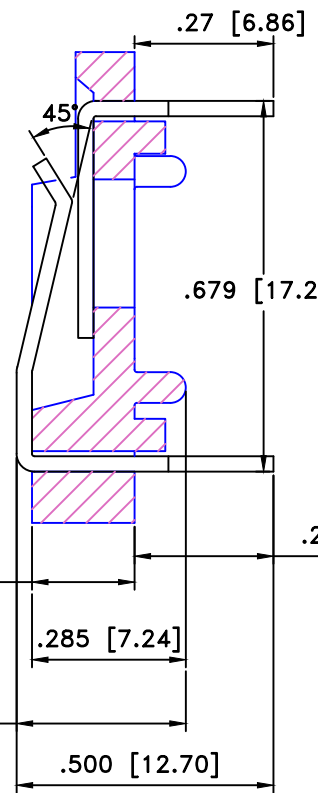
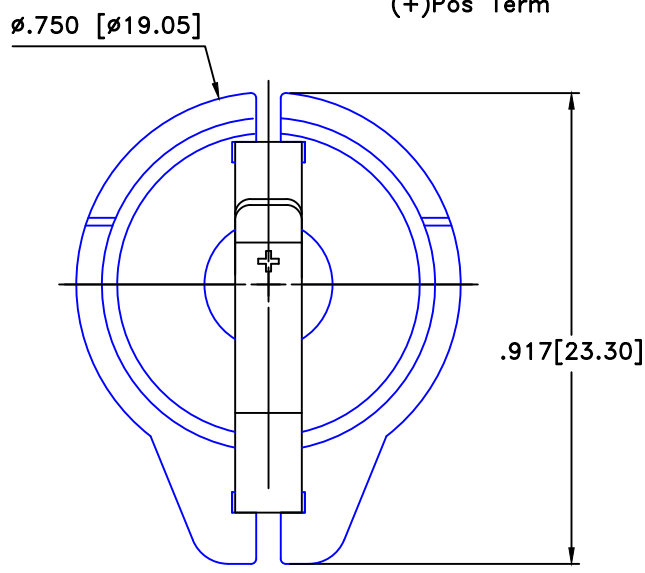



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
05/20/24	J	Dim. .917 was .920 Dim. .31 was .330 Added Dim. .275	D.L.	B.S.	
01/27/25	K	Dim. .66 was .656 Dim. .025x.030 was .025x.029 Added Dim. .275, .679, .27 Updated specification notes	D.L.	B.S.	

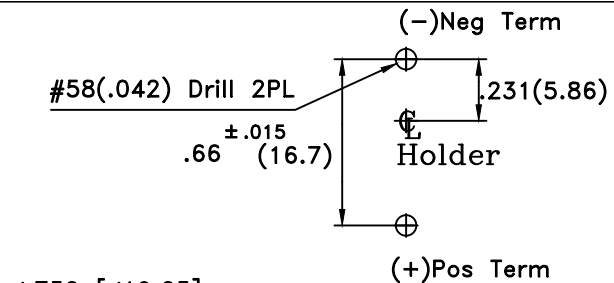

Square Contact Detail

Specifications:

- * Holder material- Thermoplastic, Black PBT
- * Flammability Rating - UL94V-0, File no. E53664
- * Contacts - 302 spring temper stainless steel, nickel plated overall
- * Dielectric strength - 560volts/mil at 25°C for 5 seconds
- * Temperature range - -55°C to +180°C
- * Resistance to solvents - Xylene, ethyl, butyl, methyl & proptl alcohol, ethyl acetate, heptane, toluene, refrigerant
- * Approximate weight: 1.74g
- * ROHS Compliant
- * Positive contact may touch the negative contact. This is acceptable.

Tolerance (Except as noted)	 Memory protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		decimal $\pm .5$ (.020)	4=1
Fractional $\pm .8$ (.030)	Title BR/CR/DL 1620/1632 COIN BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 01/27/25	Drawing Number BH600	