
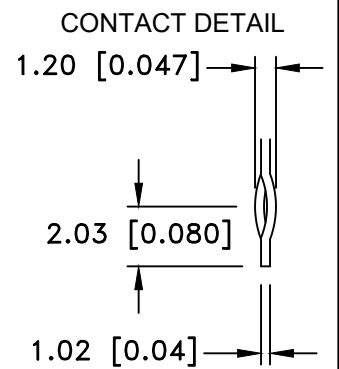
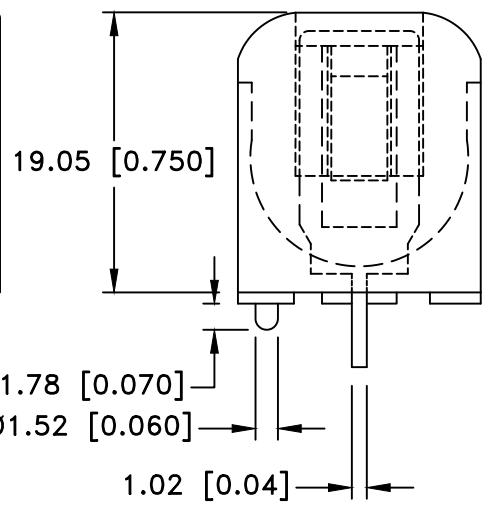
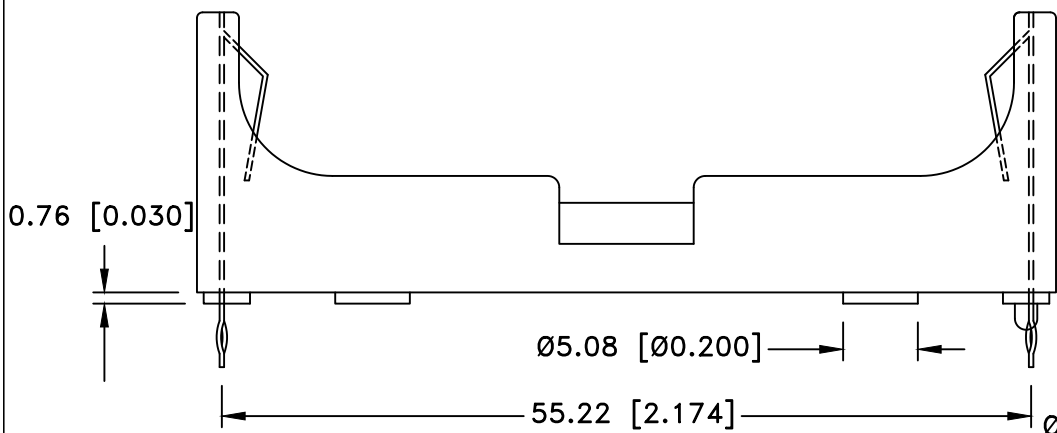


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/29/17	F	Milliseconds was micro seconds	T.B.	B.S.	
04/05/19	G	DIM. 1.02 WAS 0.51 DIM. Ø1.30 WAS Ø1.17 Dim. 1.20 was 0.81 Dim. 1.02 was 0.41 Removed Dim. 5.33	T.B.	B.S.	
01/08/24	H	Updated UL file number	D.L.	B.S.	

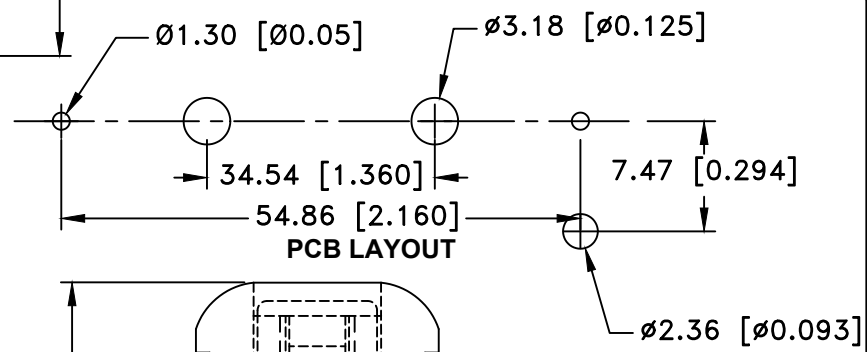

SPECIFICATIONS:


Holder Material: Black PBT, Flammability Rating: UL94V-0, FILE #E121562
 Contacts: 301 Spring temper stainless steel, nickel plated overall
 Dielectric strength: 560 Volts/mil at 25°C for 5 Sec.
 Temperature Range: -55°C to +180°C
 Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement of the cell or damage, No discontinuity over 10 micro-seconds

Shock Test: Half sine wave acceleration 150g. 6 milliseconds, 1 shock pulses each direction per axis, total of 6 pulses, No evidence of physical damage

NOTES: Eyelet Stimpson style #A1883 0.110" OD x 0.190" Flange
 Flange Recess Ø0.203" x 0.090" Deep
 Accepts Standard 2-56 Machine Screws

Accessories: BI-UM-3-4, Insulator
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735			
	decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Title AA HOLDER			
Angular ± 3°	Date 01/08/24	Drawing Number BHAA-3		
Approved By D.L.				