
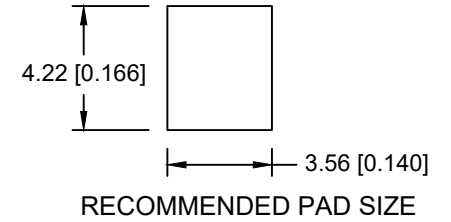
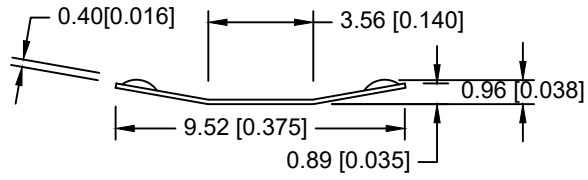



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/15/23	A	REDRAWN	DL	BS	
03/31/23	B	Updated Packaging Quantity	DL	BS	
09/14/23	C	Updated notes Changed material	DL	BS	
01/20/25	D	Added recommended pad size	DL	BS	

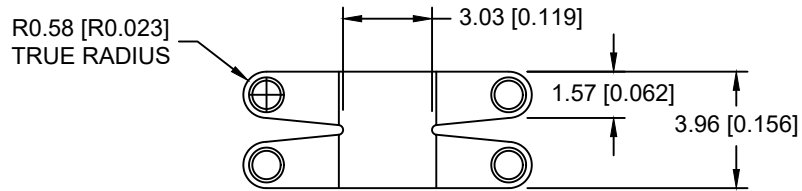

NOTES:

1. MATERIAL:

0.006" PHOS. BRONZE, NICKEL PLATED 120u,  
 GOLD PLATED 1u~3u  
 MINIMUM CELL DIAMETER: 0.430IN (11mm)  
 RECOMMENDED PAD SIZE: 0.140IN X 0.166IN (3.56mm X 4.22mm)  
 ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
Fractional ± .8 (.030)	Title NEGATIVE BATTERY CONTACT FOR 20mm DIA.		
Angular ± 3°	Date 01/20/25	Drawing Number BK-112	