
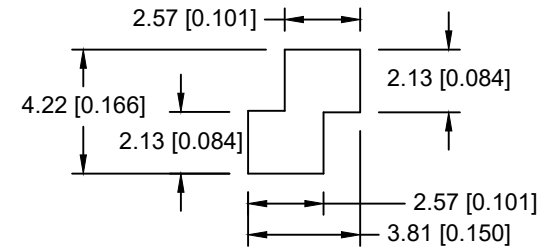


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/15/23	A	REDRAWN	DL	BS	
03/31/23	B	Updated Packaging Quantity	DL	BS	
09/14/23	C	Change material Removed packaging note Added cell diameter	DL	BS	
01/20/25	D	Dim. 7.86 was 7.95 Dim. 2.13 was 2.10	DL	BS	

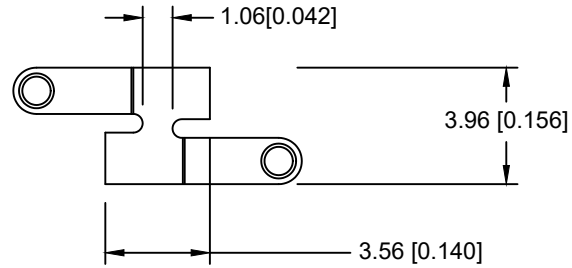


RECOMMENDED PAD SIZE

NOTES:

MATERIAL:

0.006" PHOS. BRONZE, NICKEL PLATED 120u,  
GOLD PLATED 1u~3u  
MINIMUM CELL DIAMETER: 0.354IN (9mm)  
ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S. Approved By D.L.
Fractional ± .8 (.030)	Title NEGATIVE BATTERY CONTACT FOR 12 TO 16mm DIA.		
Angular ± 3°	Date 01/20/25	Drawing Number BK-118	