
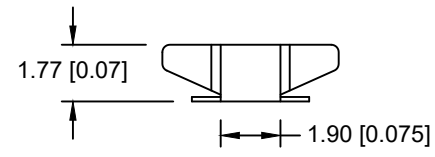
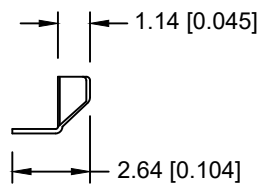
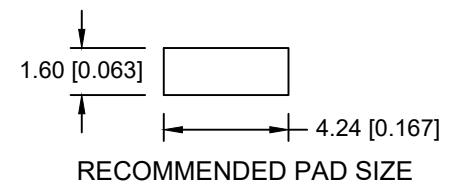



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/15/23	A	REDRAWN	DL	BS	
03/31/23	B	Updated Packaging Quantity	DL	BS	
09/14/23	C	Updated notes Changed material	DL	BS	
01/20/25	D	Added recommended pad size	DL	BS	

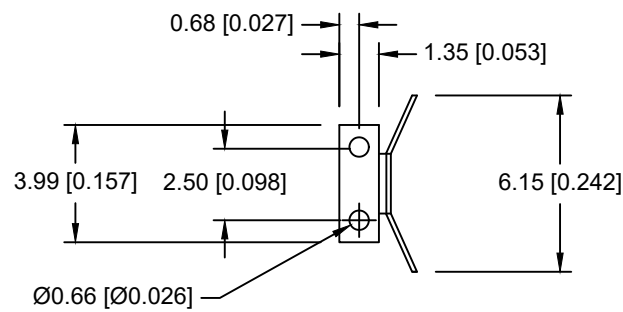

NOTES:

MATERIAL:
 0.006" PHOS. BRONZE, NICKEL PLATED 120u,
 GOLD PLATED 1u~3u
 MINIMUM CELL DIAMETER: 0.59IN (15mm)
 RECOMMENDED PAD SIZE: 0.167IN X 0.063IN (4.2mm X 1.6mm)
 ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
		decimal ±.5 (.020)	Scale
Fractional ± .8 (.030)	Title POSITIVE BATTERY CONTACT FOR UP TO 3.2mm IN HEIGHT		
Angular ± 3°	Date 01/20/25	Drawing Number BK-120	