
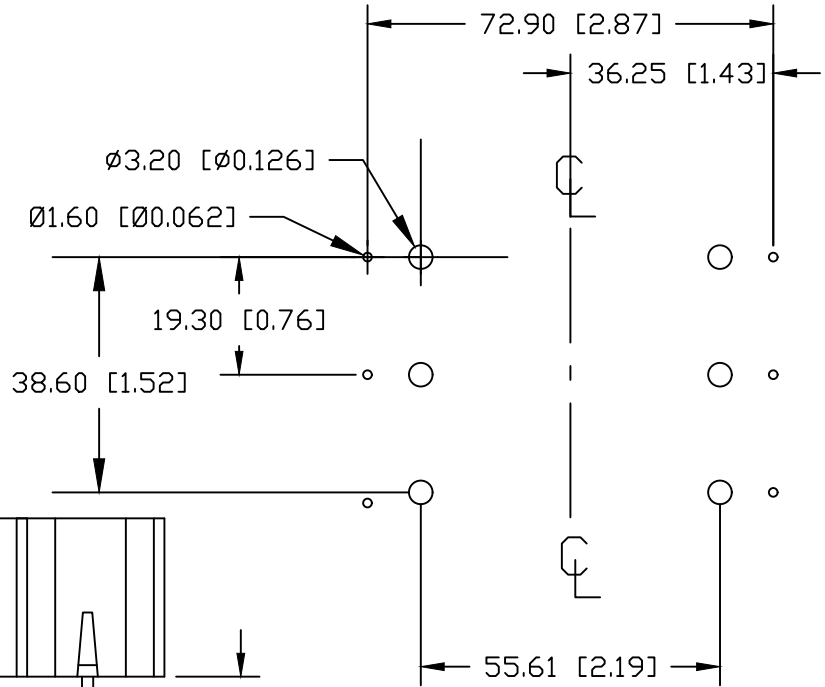
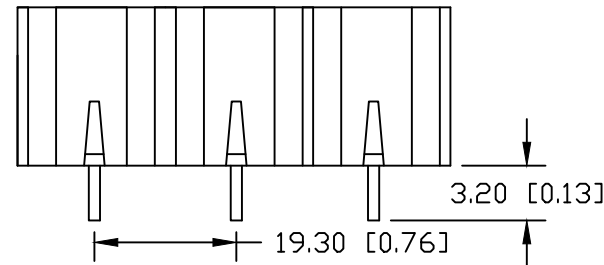
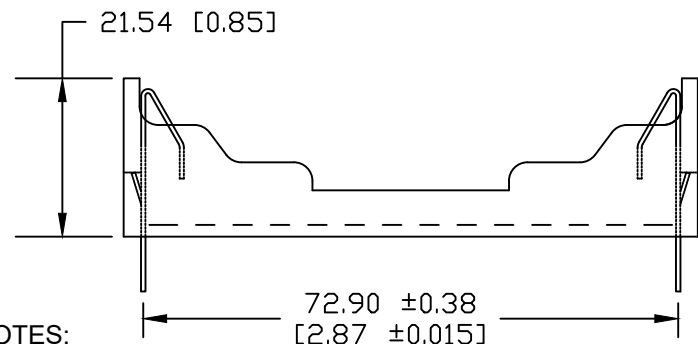


This battery holder is designed for use with protected 18650 batteries (PCB)

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/05/19	M	DIM. 72.90 WAS 72.50	T.B.	B.S.	
05/17/19	N	UPDATED NOTES	T.B.	B.S.	
10/19/23	P	ADDED UL FILE NO.	T.B.	B.S.	
08/21/24	R	UPDATED UL FILE NO.	D.L.	B.S.	

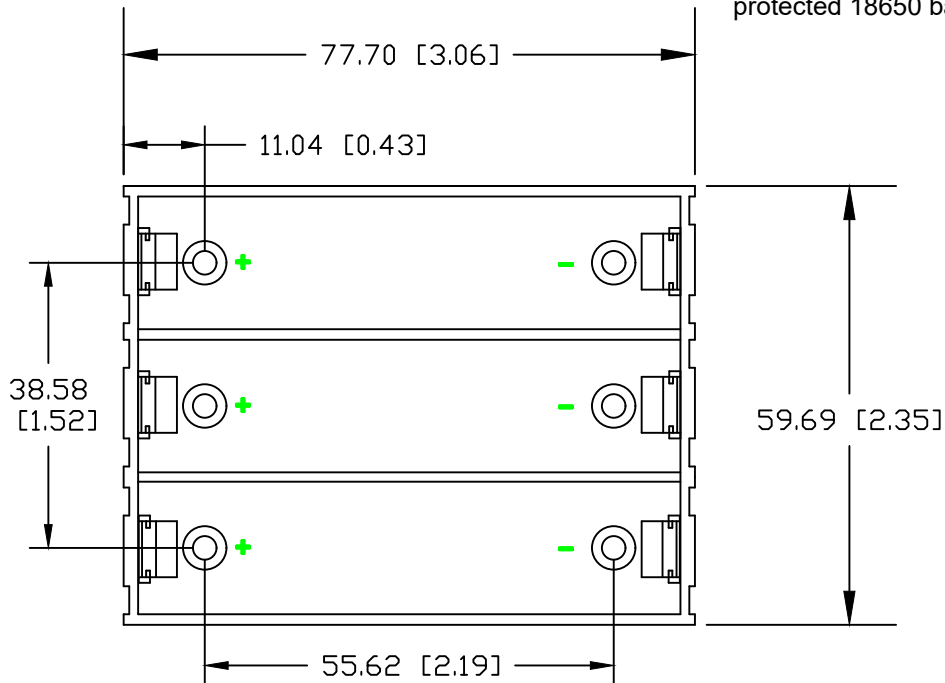


PCB LAYOUT

NOTES:

- Material: Self-extinguishing Thermoplastic Polyester, color black
- Temperature Range: -40°C to +180°C
- Contacts: 302 Stainless Steel Spring Temper, Nickel Plated
- Flammability Rating: UL 94V-0, UL File # E45587
- PC Pins: Steel, Nickel Plated
- Dielectric Strength: 560 Volts/Mil. at 25°C for 5 Sec.
- Resistance to Solvents: Xylene, ethyl, butyl, methyl & toluene
- Weight: 29.07g.
- ROHS COMPLIANT

Mounting Instruction:

Use 2-56 machine screws or eyelets 0.089" OD by 0.15" flange simpson GS-3 series or equivalent. also adhesives and double sided tapes work well.

Tolerance (Inches)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	Decimal	Scale	Drawn By B.S.
±.5 (.020)			Approved By D.L.
Fractional	Title		
± .8 (.030)	THREE 18650 LI-ION CELL HOLDER		
Angular	Date	Drawing Number	
± 3°	08/21/24	BK-18650-PC6	