



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/15/09	A	WAS 2000 PCS PER REEL	T.B.	B.S.	
09/23/11	B	REMOVED THE HOLES AT OTHER EDGE OF THE STRIP	T.B.	B.S.	
06/05/15	C	WAS 3000 PCS PER REEL	T.B.	B.S.	

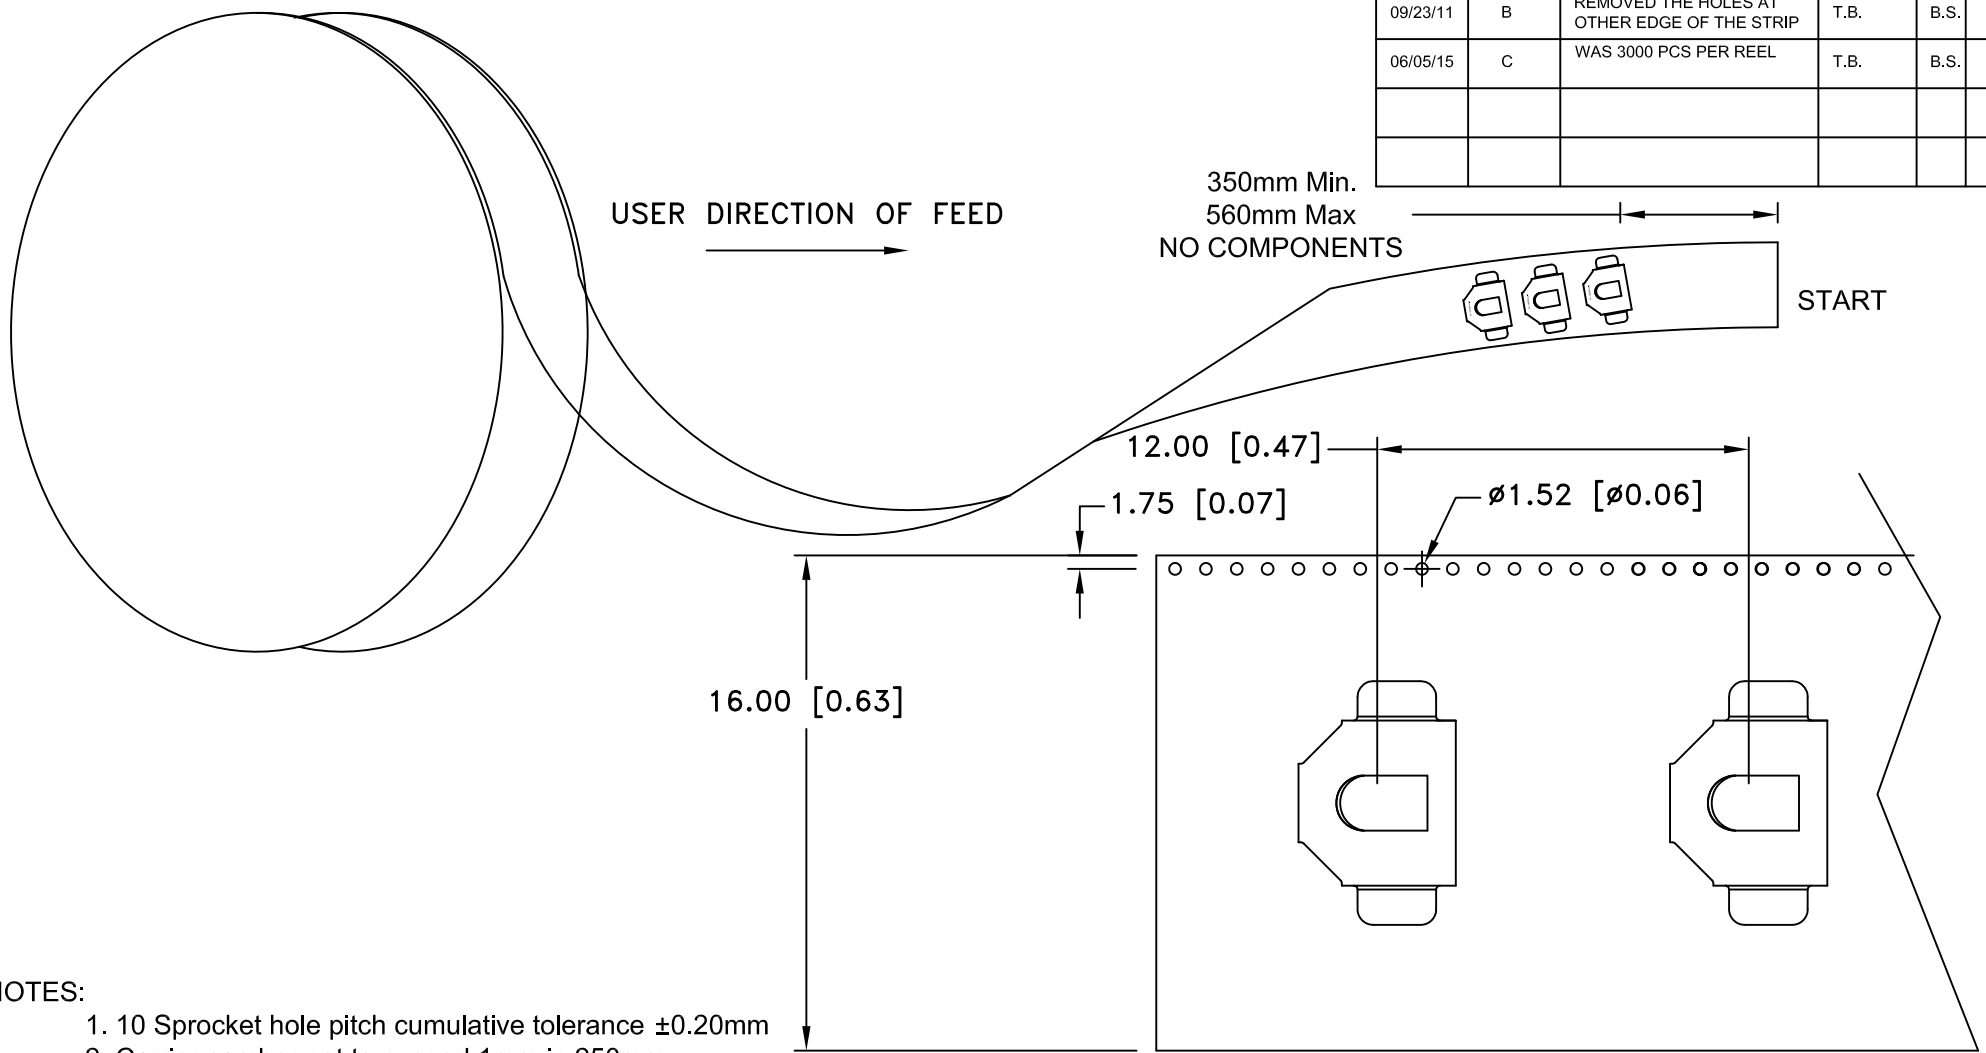

**NOTES:**

1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20$ mm
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Transparent Anti-static Polystyrene
4. Thickness:  $0.35 \pm 0.05$ mm
5. Component loader per 13" reel: 2000 pcs
6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal $\pm .5$ (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER		
Angular $\pm 3^\circ$	Date 06/05/15	Drawing Number BK-414-TR-99	