



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/30/17	A	REEL QUANTITY WAS 125 PCS	T.B.	B.S.	

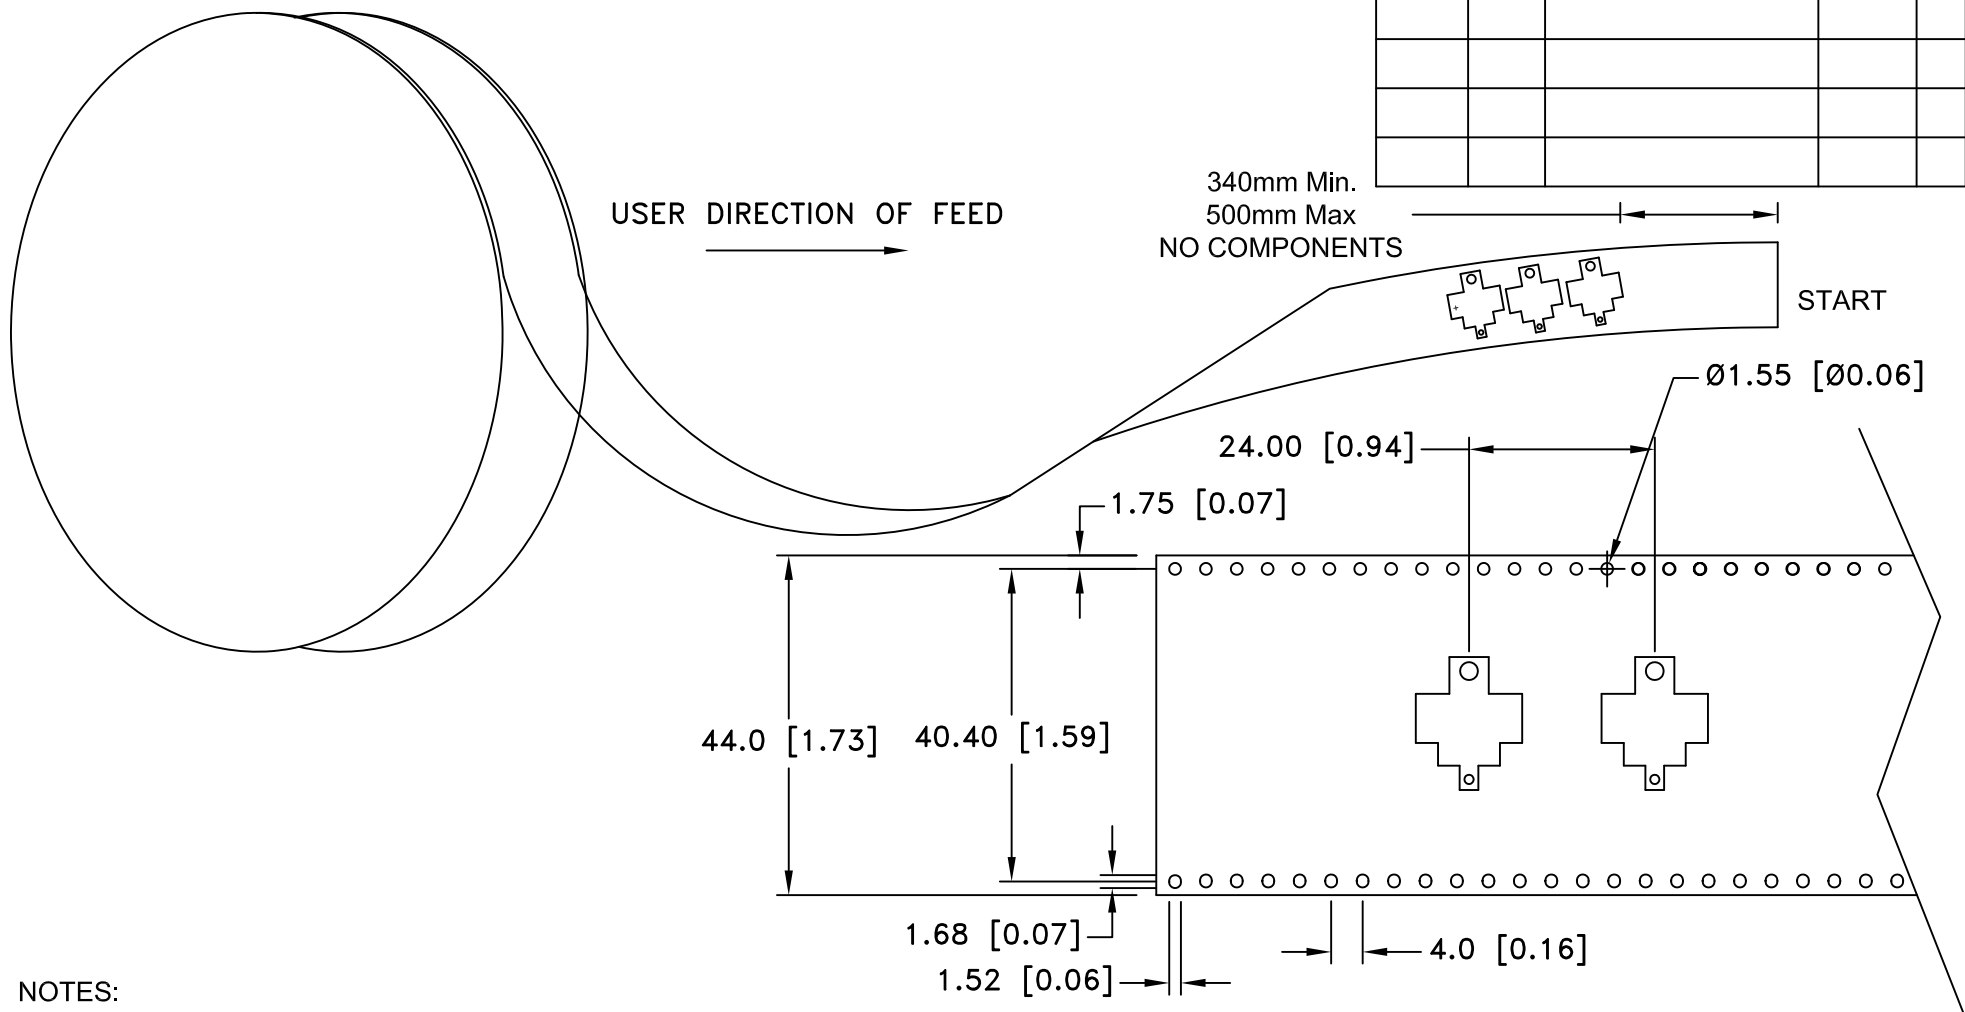

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Black Conductive Polystyrene
4. Thickness: $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 150 pcs
6. All dimensions per EIA-481-2A
7. ROHS COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-53		
Angular $\pm 3^\circ$	Date 06/30/17	Drawing Number BK-53-TR-99	
		Approved By T.B.	