



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/08/24	A	Changed orientation of the part	D.L.	B.S.	
02/14/24	B	Updated reel qty, was 1,700	D.L.	B.S.	

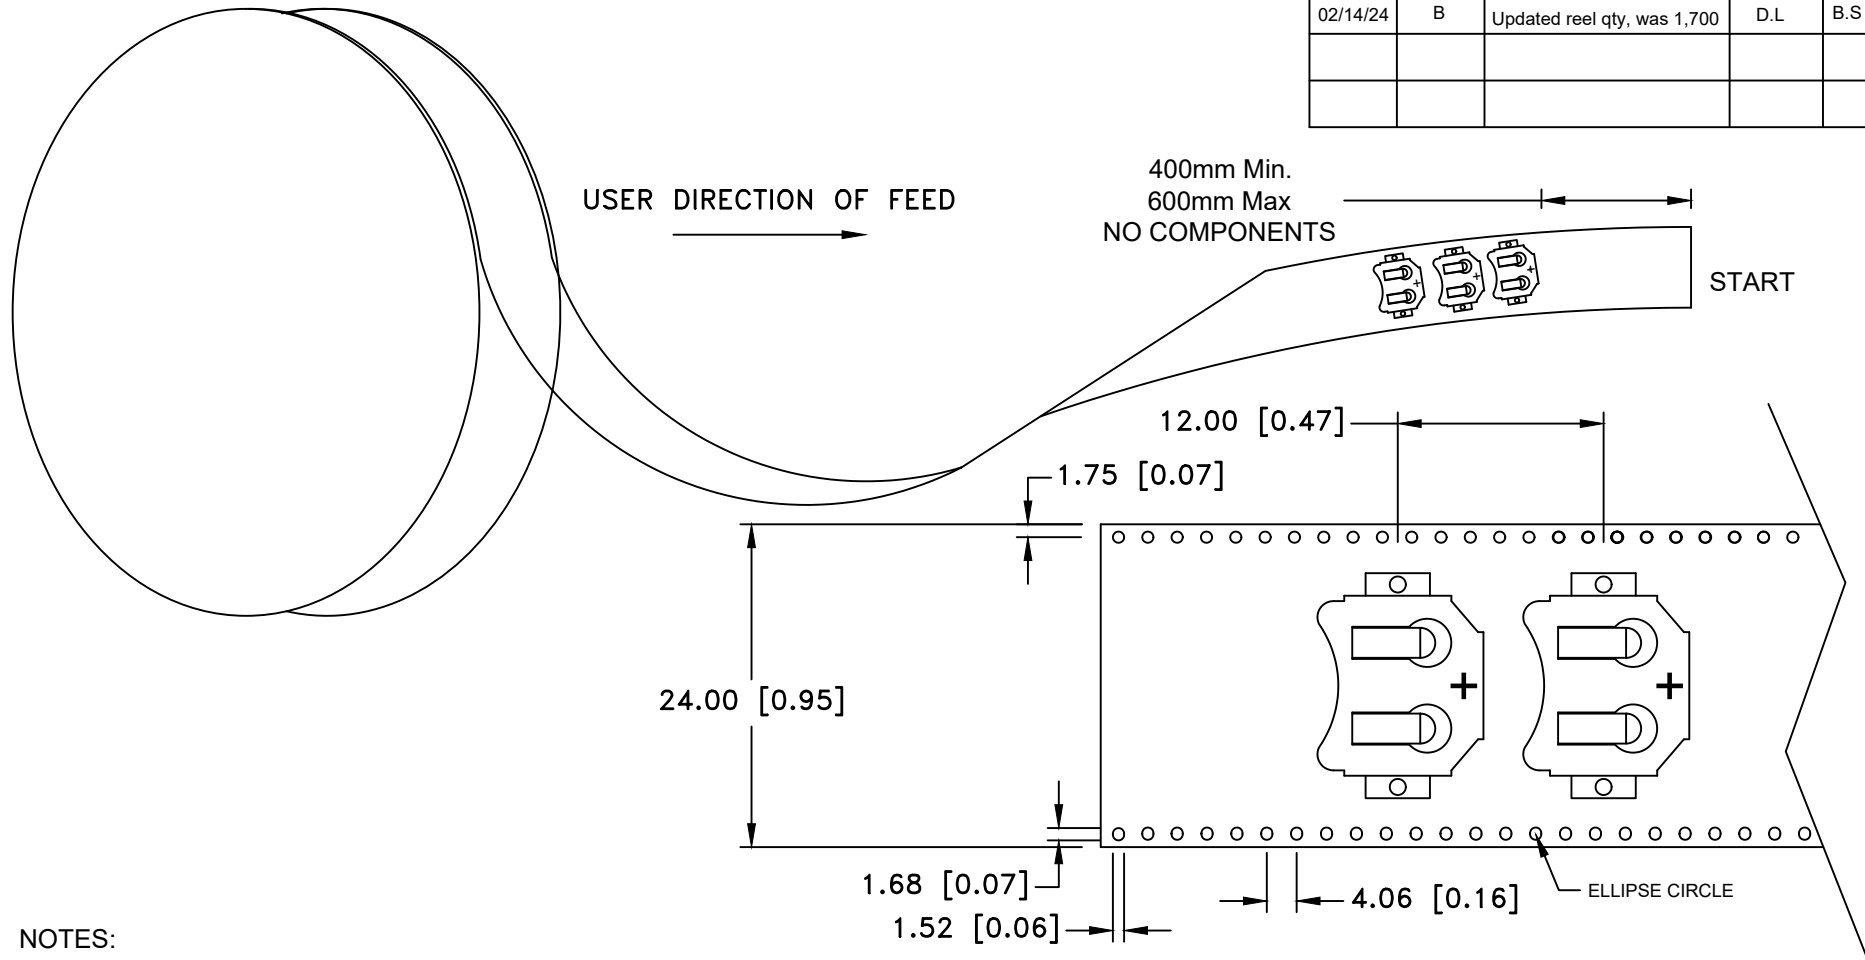

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Black Conductive Polystyrene
4. Thickness:  $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 1500 pcs
6. All dimensions per EIA-481-2A
7. ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
$\pm .5$ (.020)			Approved By D.L.
Fractional	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-879		
$\pm .8$ (.030)	Date	Drawing Number	
Angular	01/08/24	BK-879-TR-99	
$\pm 3^\circ$			