
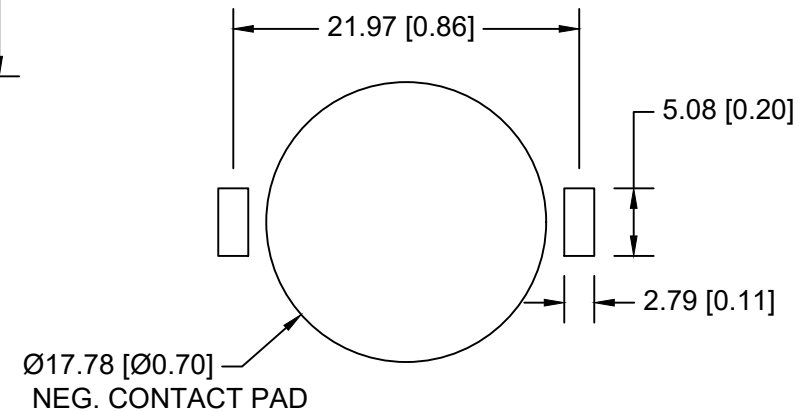



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
01/15/19	A	Updated Tolerances	T.B.	B.S.	
10/31/19	B	Added weight of the part	T.B.	B.S.	

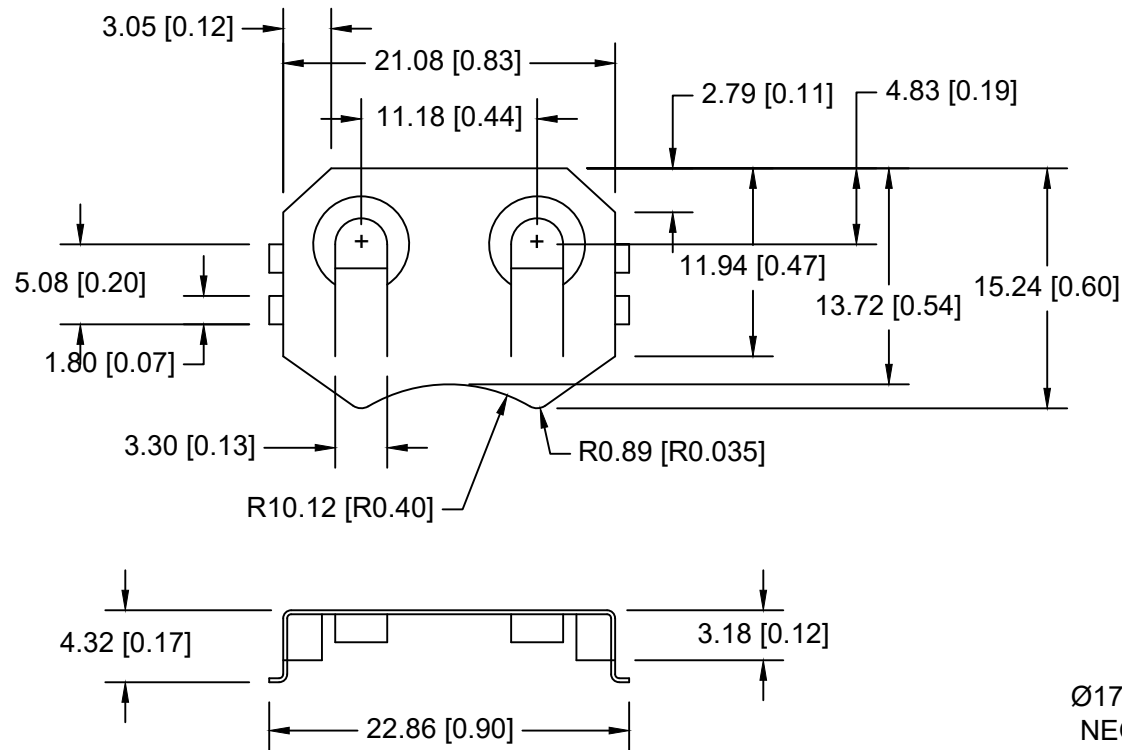

PCB LAYOUT

NOTES:

- MATERIAL:
0.25mm PHOSPHOR BRONZE, GOLD FLASH OVERALL, 1u-3u.
ROHS COMPLIANT
TEMPERATURE RANGE: -40°C TO +270°C
* VIBRATION TEST: 10-50-10 HZ SWEEPED IN 60 SECONDS
X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
* RESULT: NO DISLODGE MENT OF THE CELL OR DAMAGE
NO DISCONTINUITY OVER 10 MICRO-SECONDS
* SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.
6 MILLISECOND S
3 SHOCK PULSES EACH DIRECTION PER
AXIS, TOTAL OF 18 PULSES
* APPROXIMATE WEIGHT: 0.78g
* RESULT: NO EVIDENCE OF PHYSICAL DAMAGE

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal ±.5 (.020)	Scale	Drawn By B.S. Approved By T.B.
Fractional ±.8 (.030)	Title CR2032 BATTERY RETAINER		
Angular ± 3°	Date 10/31/19	Drawing Number BK-912-G	