



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--------------------------|-------|------|-----|
| 09/02/11 | A | CHANGED RETAINER DRAWING | T. B. | B.S. | |
| 05/12/21 | B | Dim. 44.0 was 32.0 | T. B. | B.S. | |
| | | | | | |
| | | | | | |
| | | | | | |

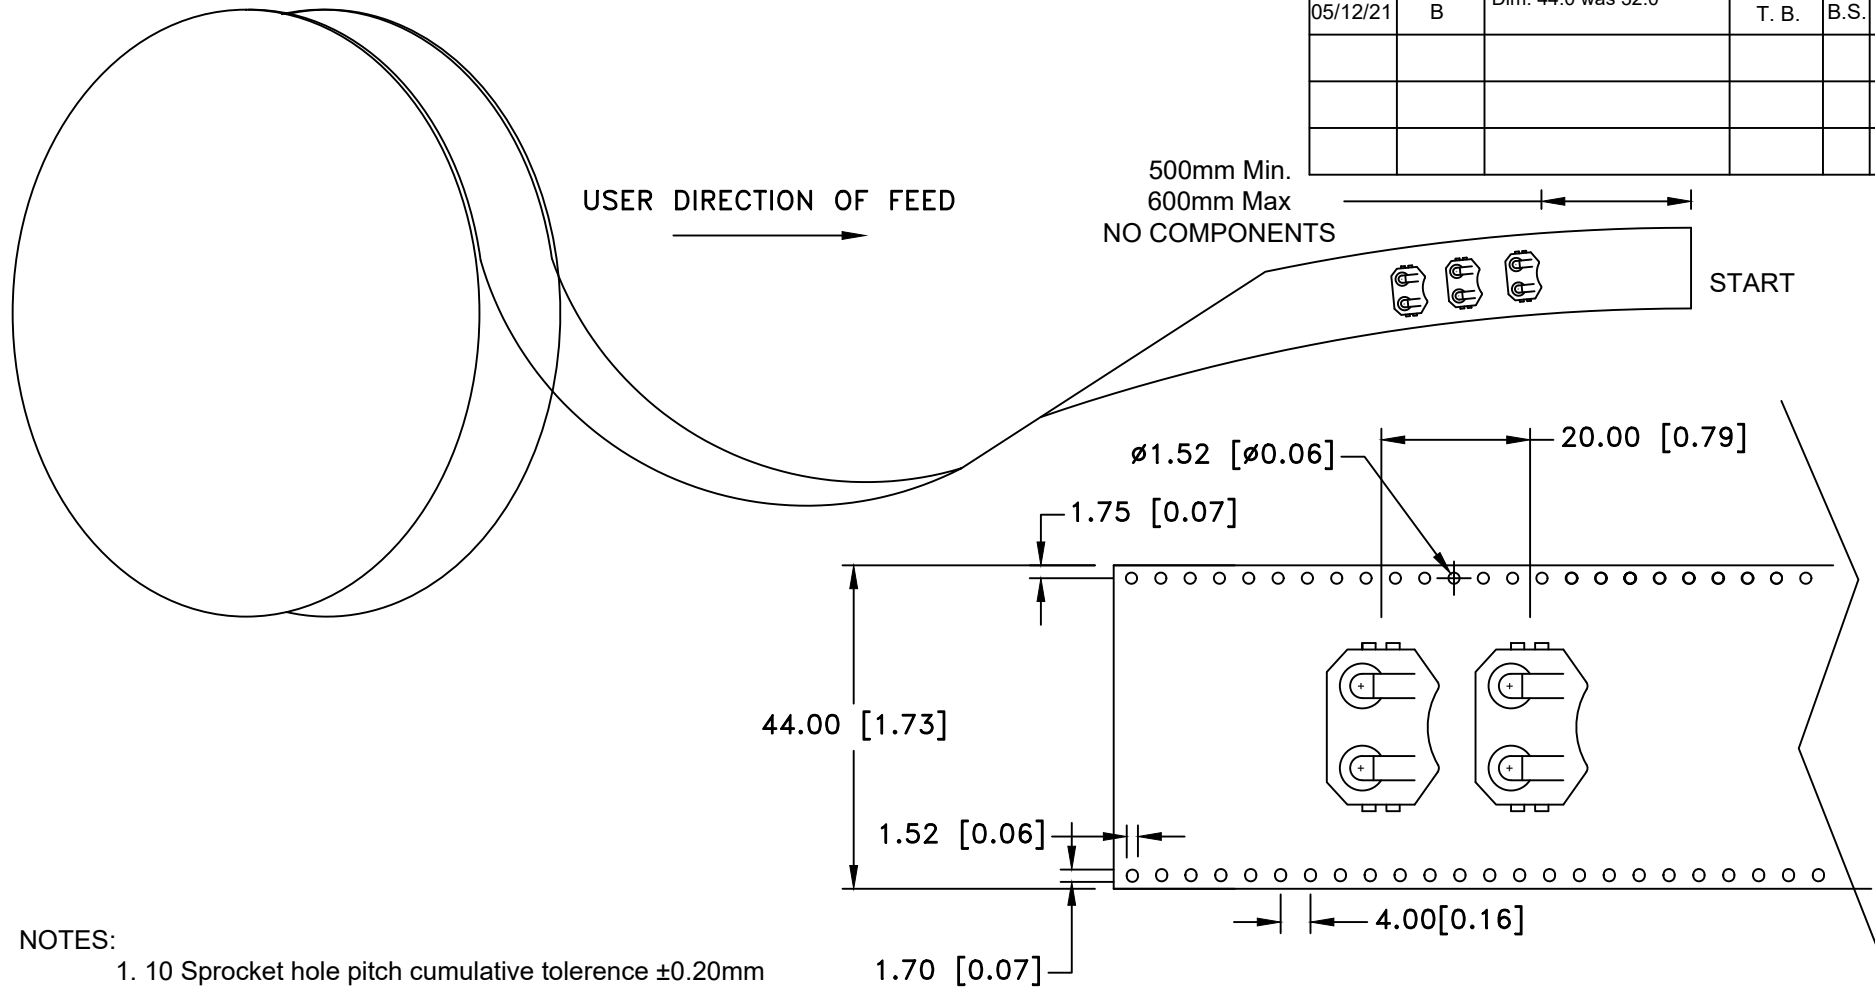

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 2. Carrier camber not to exceed 1mm in 100mm
 3. Material: Black Anti-static Polystyrene
 4. Thickness: $0.5 \pm 0.05\text{mm}$
 5. Component loader per 13" reel: 700 pcs
 6. All dimensions per EIA-481-C
- ROHS COMPLIANT

| | | | |
|--------------------------------|---|--------------------------------|---------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal $\pm .5$ (.020) | | Scale | Drawn By B.S. |
| Fractional $\pm .8$ (.030) | Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BK-912-TR | | |
| Angular $\pm 3^\circ$ | Date 05/12/21 | Drawing Number BK-912-TR-99 | |