
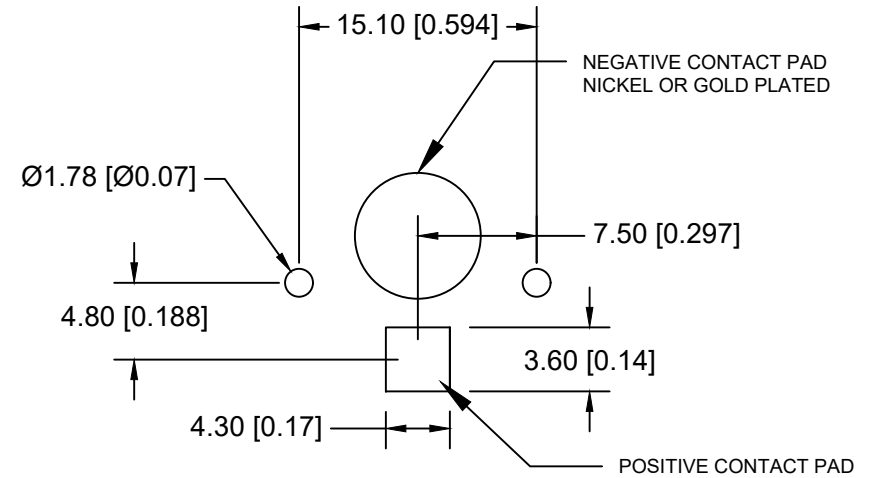
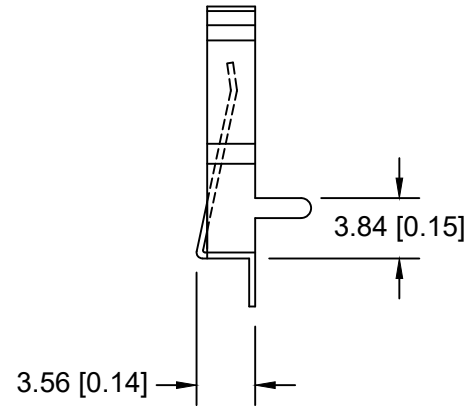


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/28/18	F	Updated neg. and pos. contact location	T.B.	B.S.	
10/31/19	G	Added weight of the part	T.B.	B.S.	

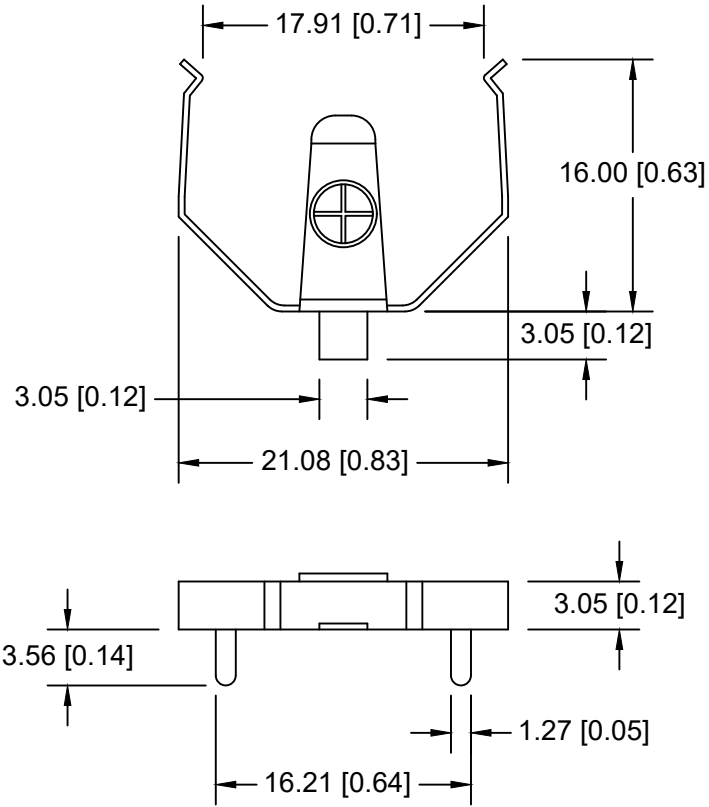


PCB LAYOUT

NOTES:

1. MATERIAL:
 0.25mm PHOSPHOR BRONZE, NICKEL PLATED OVERALL.
 ROHS COMPLIANT
 TEMPERATURE RANGE: -40°C TO +270°C

VIBRATION TEST: 10-50-10HZ SWEEPED IN 60 SECONDS
 X,Y,Z DIRECTION: 1 HOUR EACH DIRECTION
 RESULTS: NO DISLODGE MENT OF THE CELL OR DAMAGE
 NO DISCONTINUITY OVER 10 MICRO-SECONDS
 SHOCK TEST: HALF SINE WAVE ACCELERATION 150G.
 6 ms 1 SHOCK PULSES EACH DIRECTION PER AXIS
 RESULTS: NO EVIDENCE OF PHYSICAL DAMAGE
 DROP TEST: MOUNTED ON BOARD AND DROPPED 1 TIME PER
 DIRECTION FROM 1m HIGH TO WOODEN FLOOR
 RESULTS: NO DISLODGE MENT OF THE CELL, NO DAMAGE TO THE
 HOLDERS
 APPROXIMATE WEIGHT: 0.60g

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
	decimal	Scale	Drawn By B.S.
±.1 (.004)			Approved By T.B.
Fractional	Title		
± .2 (.008)	BR/CR 2032 BATTERY RETAINER		
Angular	Date	Drawing Number	
± 1°	10/31/19	BK-915	