



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/20/12	A	Dim. 44.00 was 56.00 Dim. 40.40 was 52.56	T.B.	B.S.	

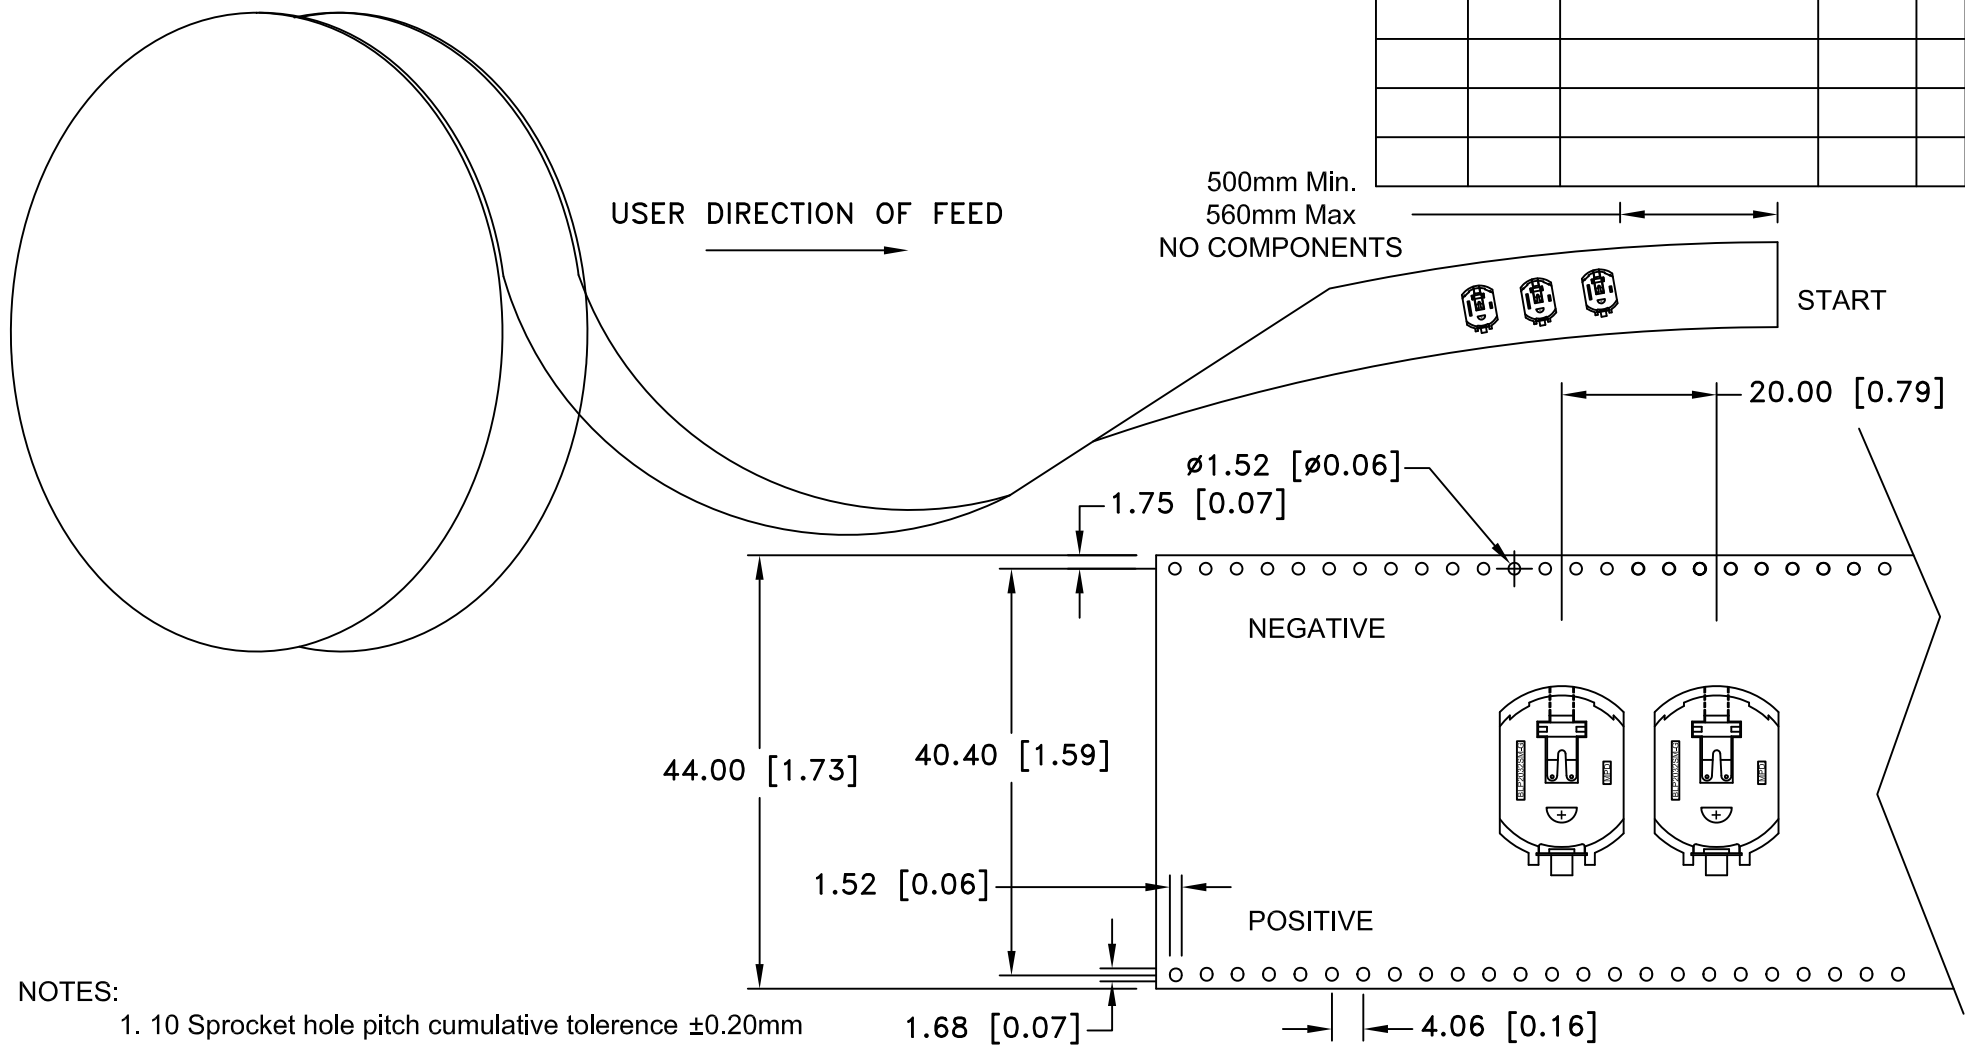

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness:  $0.35 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 600 Pcs.
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S. Approved By T.B.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BLP2032SM		
Angular $\pm 3^\circ$	Date 07/20/12	Drawing Number BLP2032SM-GTR-99	