



Date	SYM	REVISION RECORD	AUTH	DR.	CK.



- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance ±0.20mm
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness: 0.35±0.05mm
  5. Component loader per 13" reel: 600 Pcs.
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale	Drawn By B.S.	
Fractional ± .8 (.030)	Approved By T.B.		
Angular ± 3°	Date 01/14/21	Drawing Number BRX1-1632-SM-99	

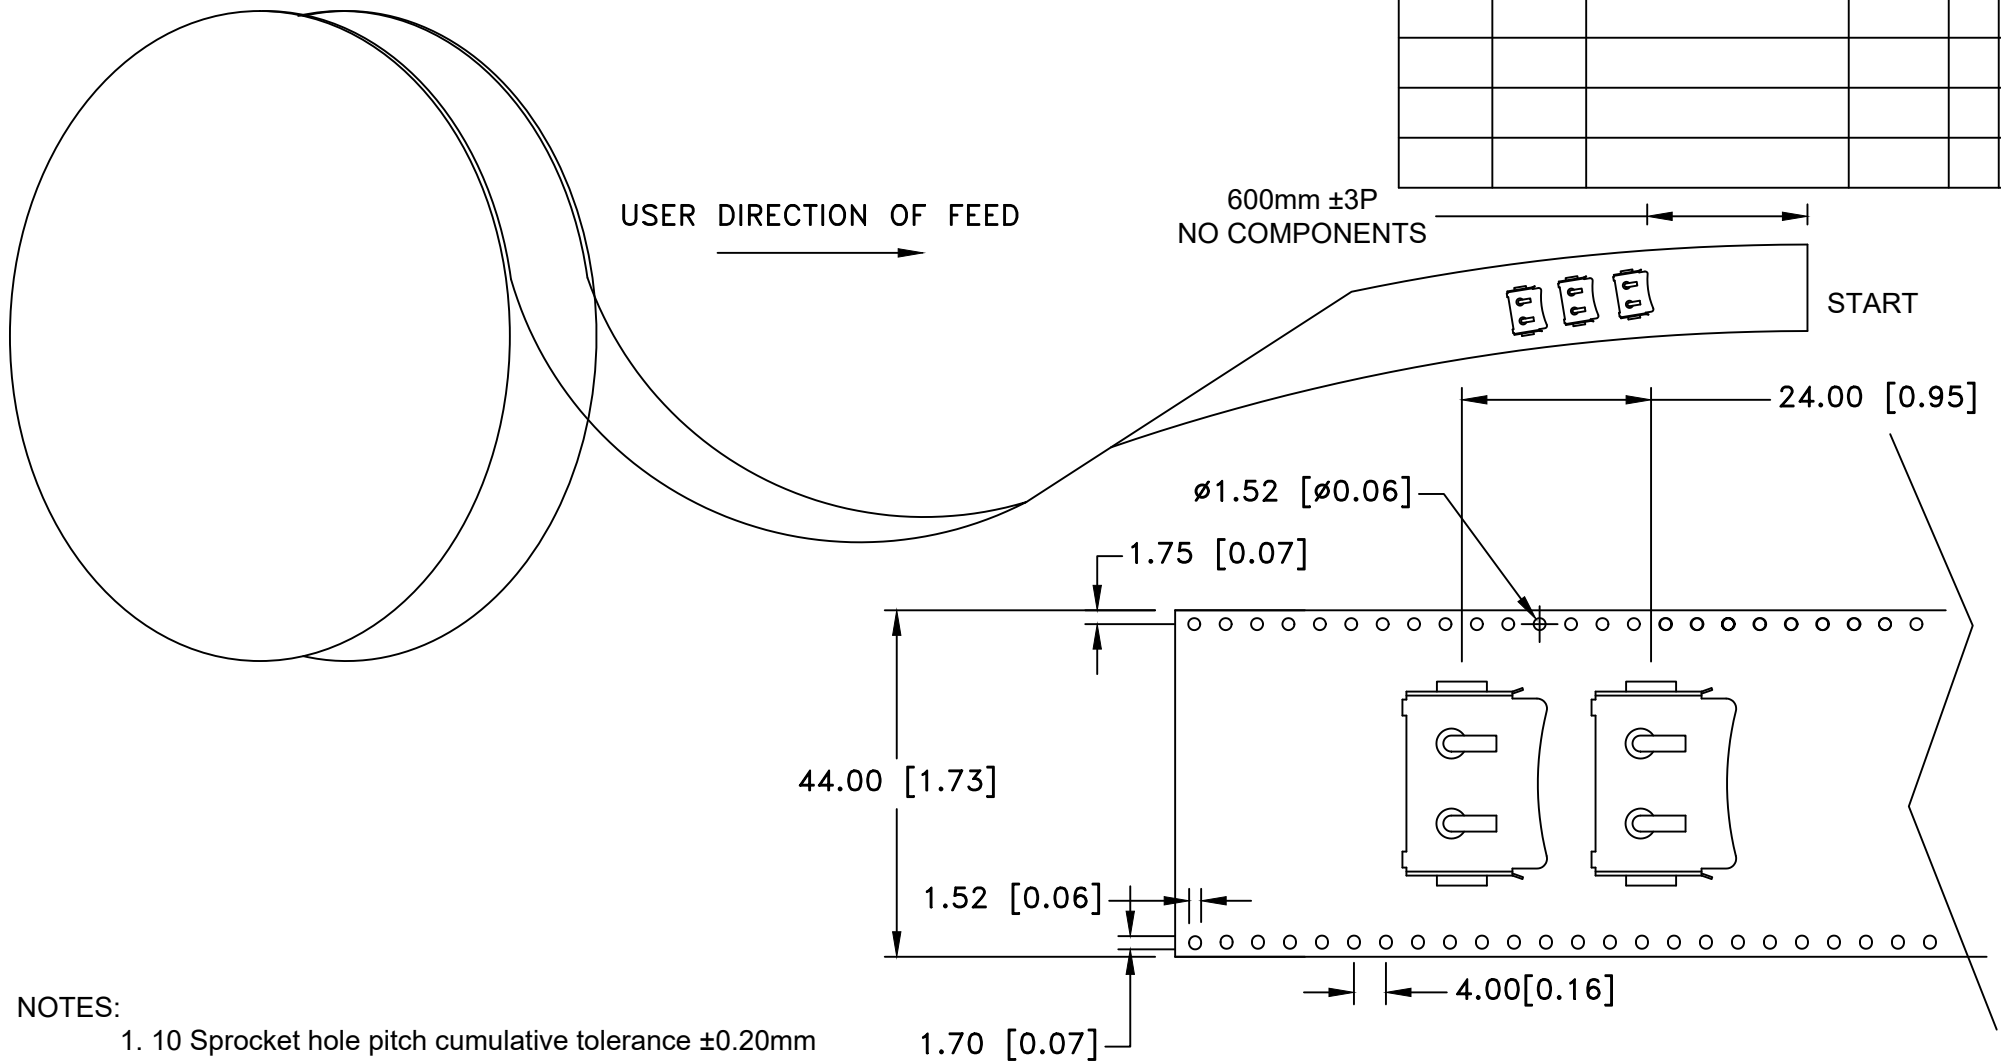

**Memory Protection Devices, Inc**  
200 Broad Hollow Road, Farmingdale, New York 11735

Scale Drawn By B.S.

Approved By T.B.

Title TAPE AND REEL SPECIFICATION FOR  
SURFACE MOUNT BATTERY HOLDER FOR BRX1-1632

Date 01/14/21 Drawing Number BRX1-1632-SM-99