
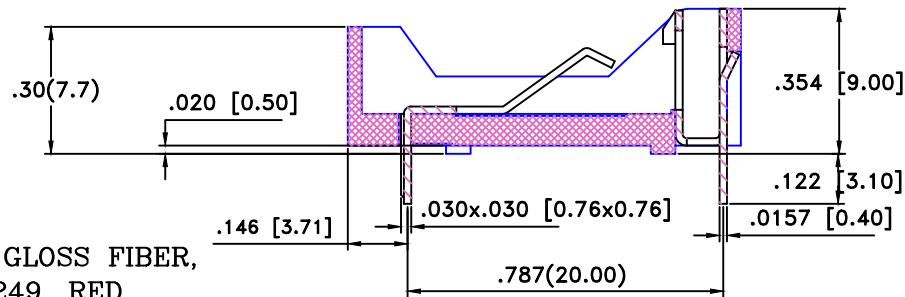
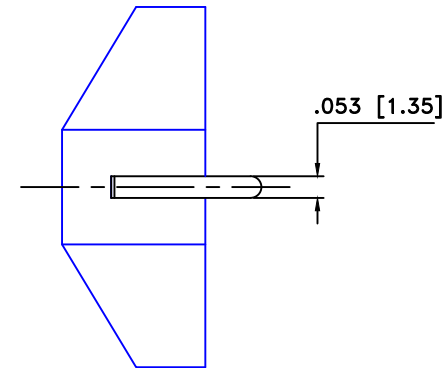


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
02/17/22	E	CHANGED MATERIAL	T.B.	B.S.	
10/31/24	F	Dim. 0.030x0.030 was 0.025x0.026	T.B.	B.S.	

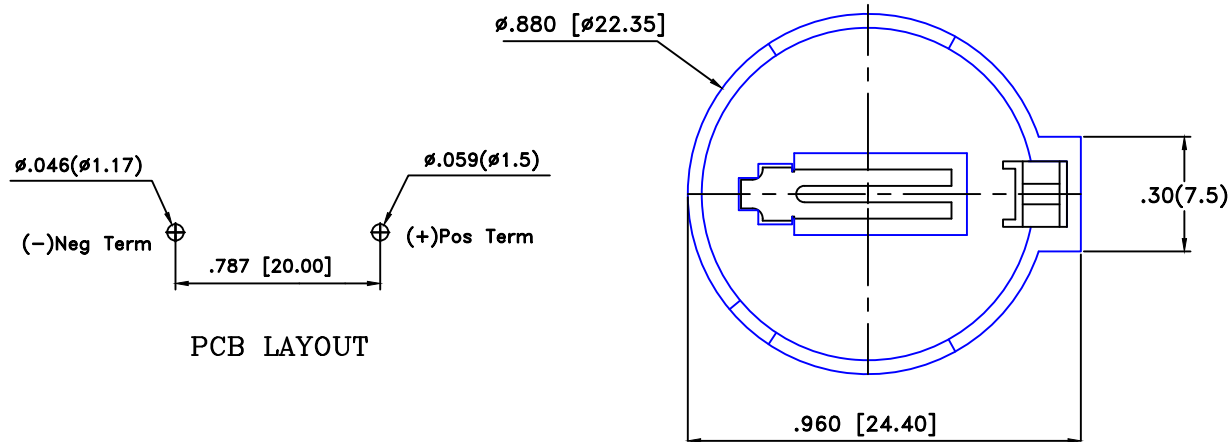

**MATERIAL**

BODY: NYLON66, 3090 GLOSS FIBER,  
UL FILE NO.245249, RED

CONTACT: PHOSPHOR BRONZE

**FINISH**

CONTACT: NICKEL PLATED OVERALL

**SPECIFICATIONS**

APPLICATION FOR 3V LITHIUM BATTERY, CR2032 OR BR2032

INSULTOR RESISTANCE: 5000 mΩ MIN.


OPPERATION TEMPERATURE: -55°C TO +105°C

DURABILITY: 50 CYCLES MIN

CONTACT RESISTANCE: 30 mΩ MAX

ROHS COMPLIANT

Weight: 1.83g

Tolerance (Except as noted)	 <b>Memory protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)	Scale 4=1	Drawn By T.S.	
Fractional ± .8 (.030)	Title CR2032 BATTERY HOLDER WITH EASY RELEASE CLIP		
Angular ± 3°	Date 10/31/24	Drawing Number BS-7-RED	