



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
4/24/09	A	Dim. Ø1.55 was Ø1.52 Dim. 4.00 was 4.06 500 pcs/Reel was 400pcs	T.B.	B.S.	

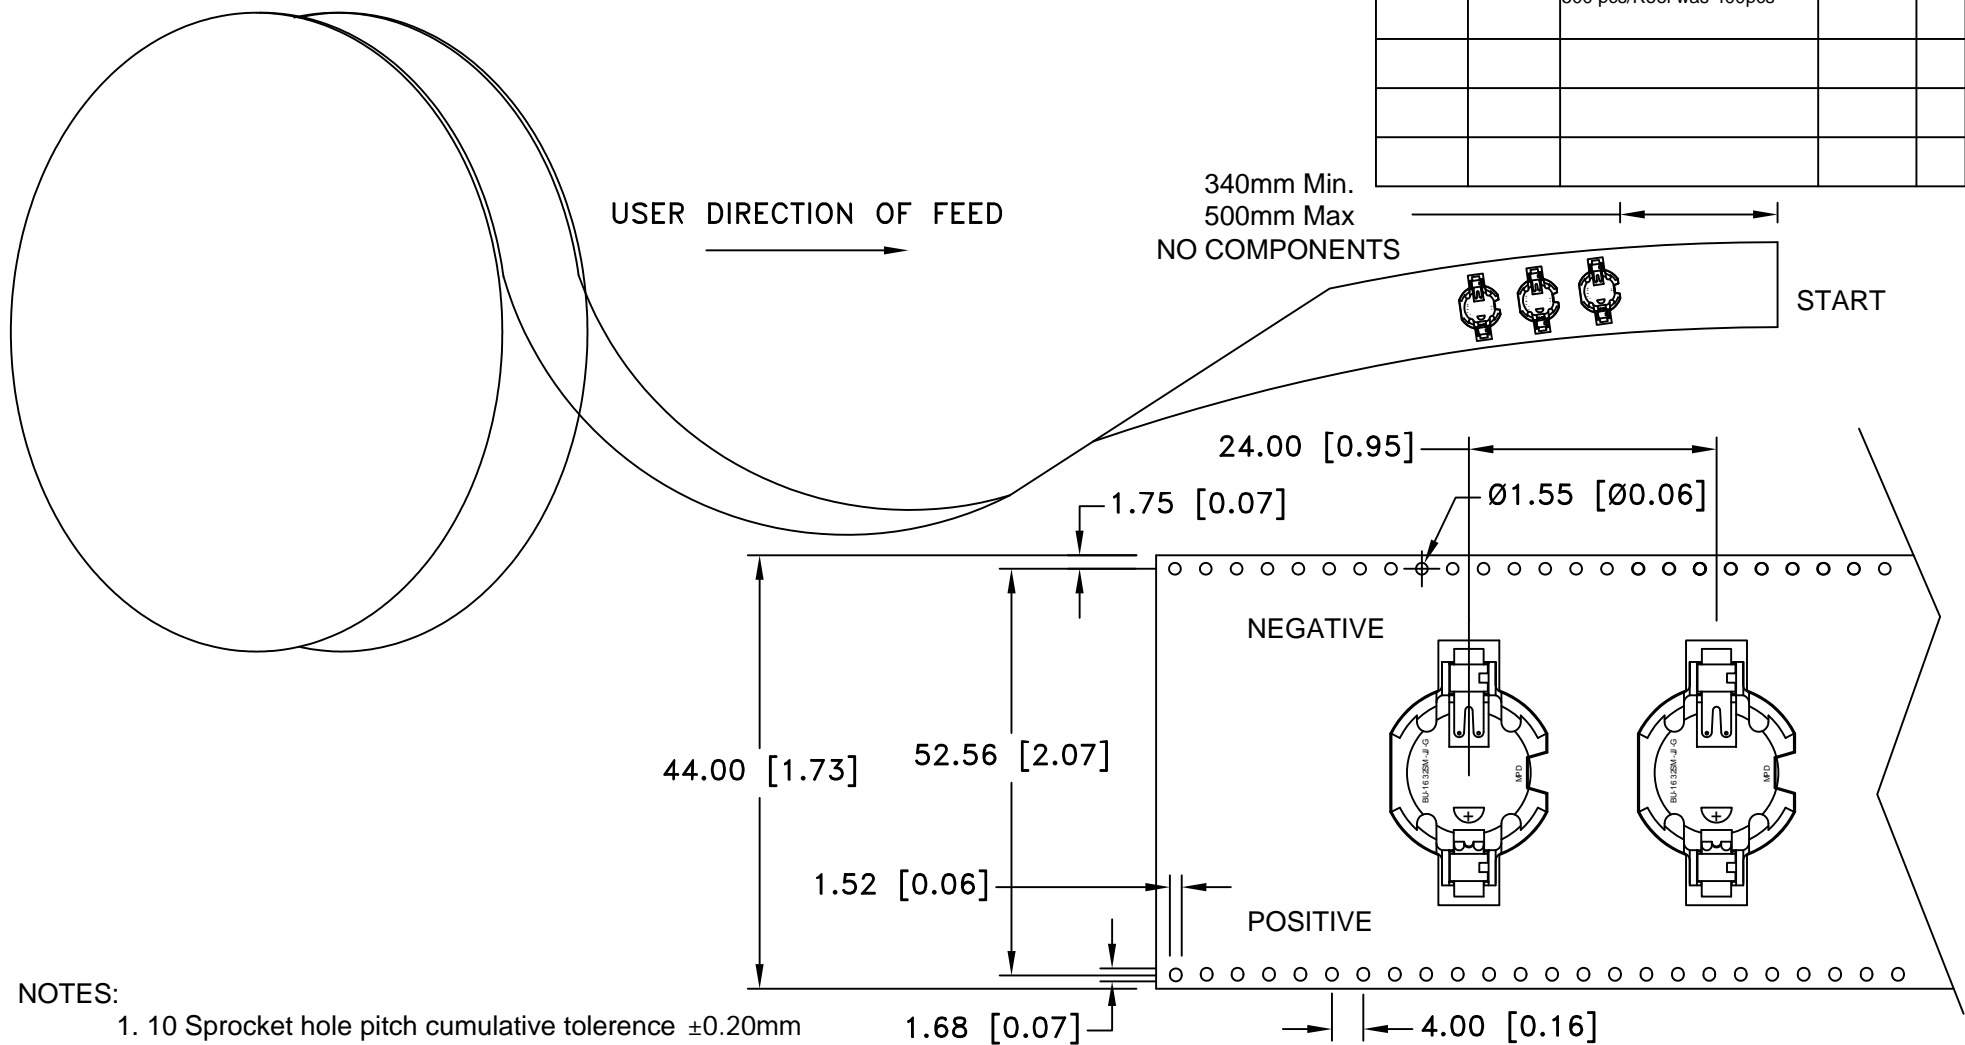

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Transparent Anti-static Polystyrene
4. Thickness: $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 500 pcs
6. All dimensions per EIA-481-C

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BU1632SM		
Angular $\pm 3^\circ$	Date 4/24/09	Drawing Number BU1632SM-JJ-GTR-99	
		Approved By T.B.	