



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
12/04/20	A	Updated drawing	A	BS	

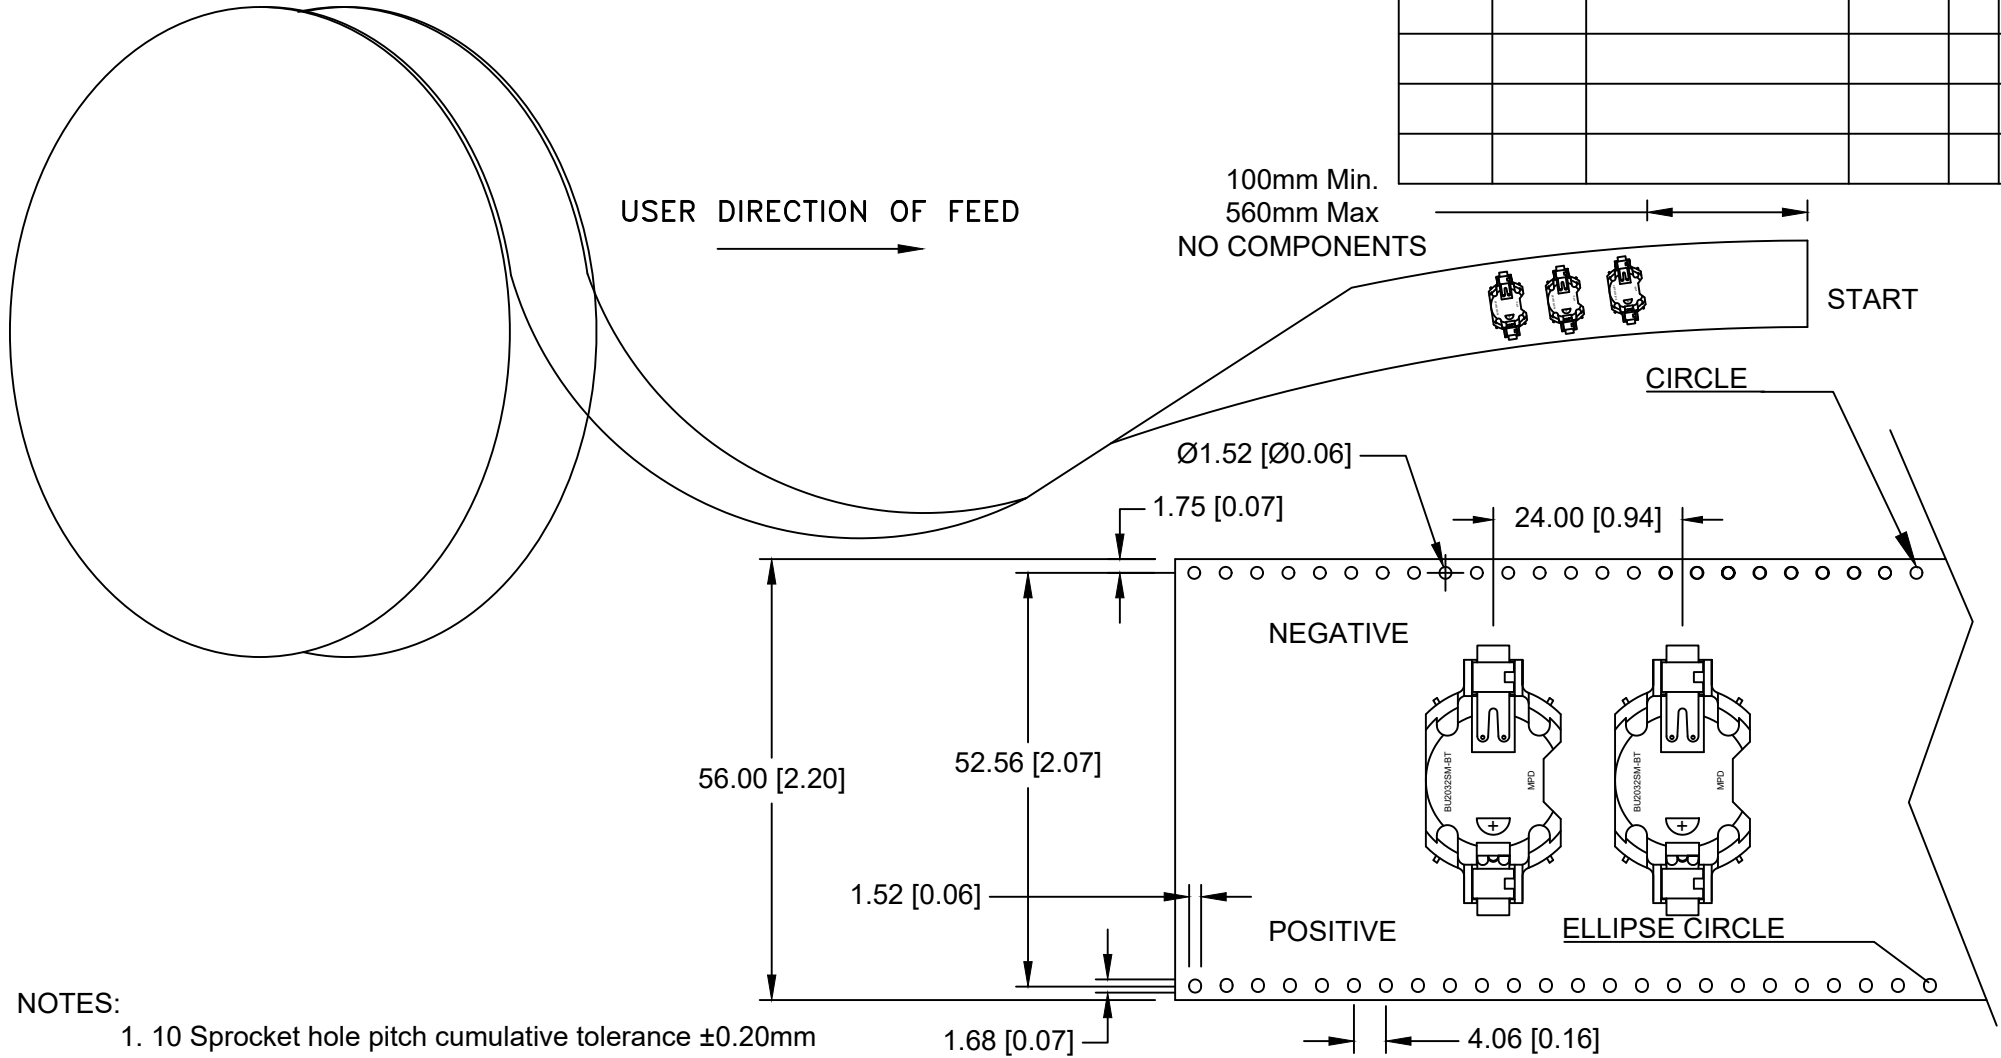

- NOTES:
- 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
 - Carrier camber not to exceed 1mm in 250mm
 - Material: Transparent Anti-static Polystyrene
 - Thickness: $0.35 \pm 0.05\text{mm}$
 - Component loader per 13" reel: 400 pcs
 - All dimensions per EIA-481-2A

ROHS Compliant

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR P/N BU2032SM-BT-GTR		
Angular $\pm 3^\circ$	Date 12/04/2020	Drawing Number BU2032SM-BT-GTR-99	
		Approved By T.B.	