



Date	SYM	REVISION RECORD	AUTH	DR.	CK.

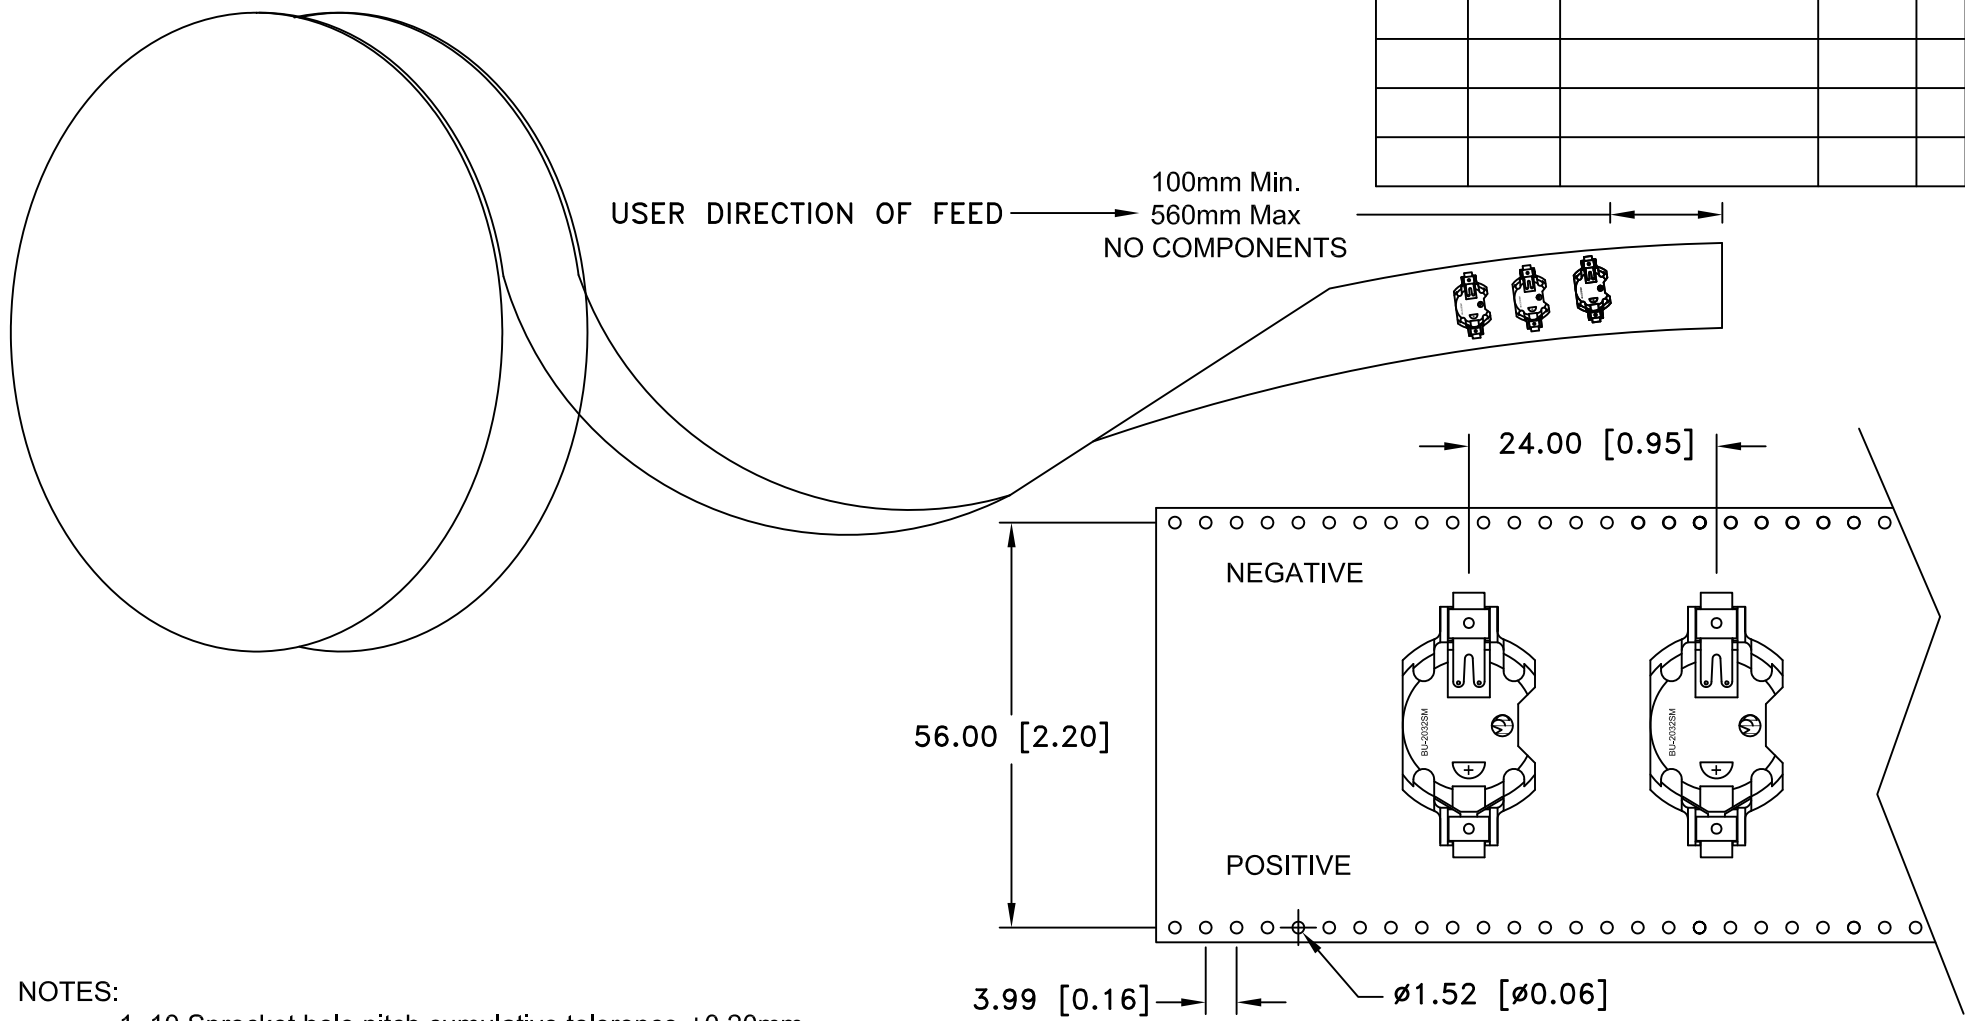

- NOTES:
1. 10 Sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
  2. Carrier camber not to exceed 1mm in 250mm
  3. Material: Transparent Anti-static Polystyrene
  4. Thickness:  $0.35 \pm 0.05\text{mm}$
  5. Component loader per 13" reel: 400 pcs
  6. All dimensions per EIA-481-2A

Tolerance (Except as noted)		Memory Protection Devices, Inc	
		200 Broad Hollow Road, Farmingdale, New York 11735	
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional $\pm .8$ (.030)	Title	TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR CR2032	
Angular $\pm 3^\circ$	Date	Drawing Number	
	03/01/13	BU2032SM-G-99	