



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
07/16/24	A	Updated reel quantity	D.L.	B.S.	

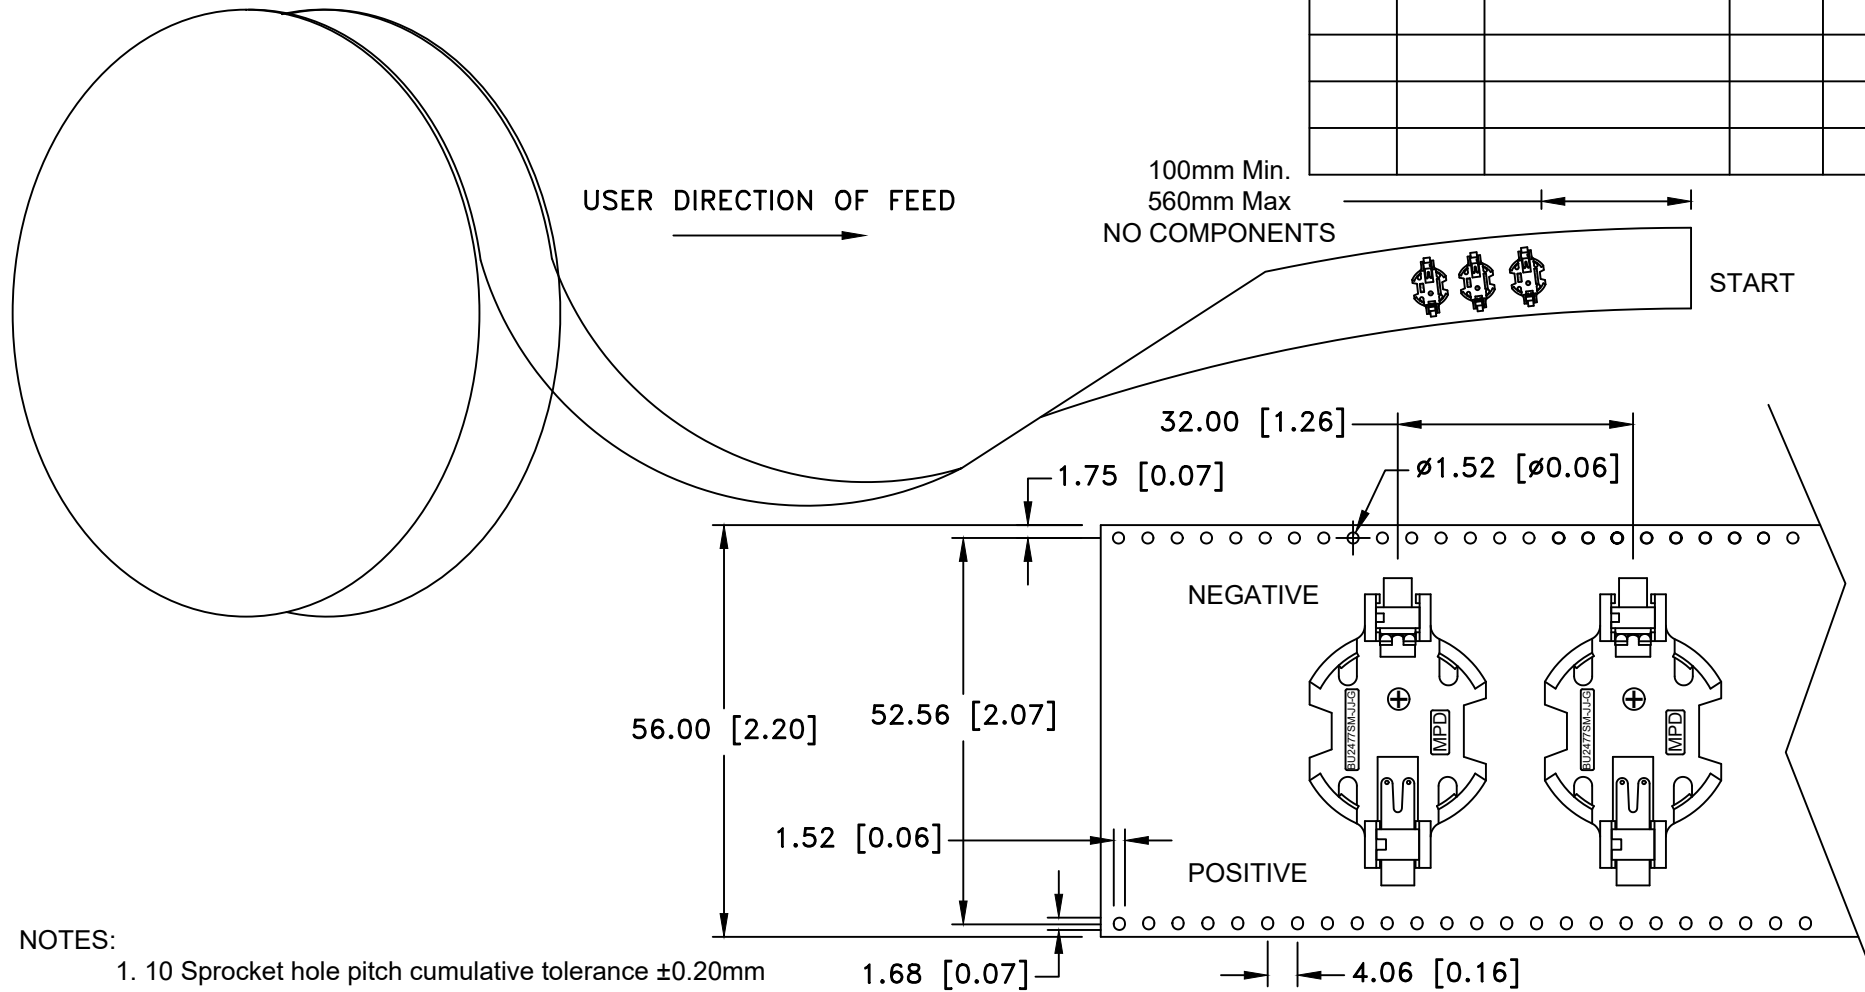

NOTES:

1. 10 Sprocket hole pitch cumulative tolerance $\pm 0.20\text{mm}$
2. Carrier camber not to exceed 1mm in 250mm
3. Material: Transparent Anti-static Polystyrene
4. Thickness: $0.35 \pm 0.05\text{mm}$
5. Component loader per 13" reel: 180 pcs
6. All dimensions per EIA-481-2A

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
Fractional $\pm .8$ (.030)	Title TAPE AND REEL SPECIFICATION FOR SURFACE MOUNT BATTERY HOLDER FOR BU2477SM		
Angular $\pm 3^\circ$	Date 07/16/24	Drawing Number BU2477SM-JJ-GTR-99	
		Approved By D.L.	